

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-093-21816-00-00  
Spot: SWSWSW Sec/Twnshp/Rge: 27-26S-36W  
330 feet from S Section Line, 330 feet from W Section Line  
Lease Name: TATE Well #: 9-3-27  
County: KEARNY Total Vertical Depth: 1837 feet

Operator License No.: 32864

Op Name: XTO ENERGY INC.

Address: 210 PARK AVE STE 2350  
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	480		

59.70

Well Type: LH

UIC Docket No:

Date/Time to Plug: 01/04/2008 6:30 PM

Plug Co. License No.: 33784

Plug Co. Name: TRINIDAD DRILLING LIMITED PARTNERSHIP

Proposal Rcvd. from: BRIAN TELLER

Company: XTO ENERGY

Phone: (405) 232-4011

Proposed Plugging Method: 1ST PLUG AT 1180' WITH 50 SX CMT. 2ND PLUG AT 790' WITH 50 SX CMT. 3RD PLUG AT 510' WITH 50 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Plugging Proposal Received By: RICHARD LACEY

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 01/04/2008 8:00 PM

KCC Agent: ERIC MACLAREN

Actual Plugging Report:

Perfs:

DRILL COLLARS AND DRILL PIPE LEFT IN HOLE= 1088'. TOP OF FISH @ 749'. 1ST PLUG AT 749' WITH 50 SX CMT. 2ND PLUG AT 510' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. CMT CIRCULATED.

INVOICED  
DATE 1-17-08  
INV. NO. 2008061078

RECEIVED  
KANSAS CORPORATION COMMISSION


JAN 11 2008

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY BASIC ENERGY.

Plugged through: DP

District: 01

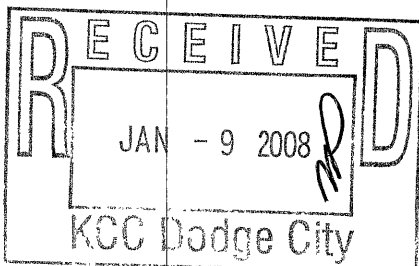

Signed Eric MacLaren  
(TECHNICIAN)

Form CR 2/3