

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

X			

Locate well correctly on above Section Plat

Rooks County, Sec. 31 Twp. 8 Rge. 17 (EX) (W)
Location as "NE/CNW/SW" or footage from lines SW NW
Lease Owner Fender Pipe & Supply Co.
Lease Name H.M. Russ Well No. 1
Office Address Box 302 Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil well
Date well completed _____ 19____
Application for plugging filed 5-13-68 19____
Application for plugging approved 5-14-68 19____
Plugging commenced 5-14-68 19____
Plugging completed 5-16-68 19____
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3420 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4	1300	none
				7"	3242	1500'
				5 1/2"	3420	1510'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole with gravel to 3300' and dump 5 sacks of cement with dump bailer

Allied Cementing pumped 40 sacks of mud, 10 sacks of hulls and 200 sacks of cement down 10 3/4" pipe

RECEIVED
STATE CORPORATION COMMISSION
MAY 27 1968
CONSERVATION DIVISION
Wichita, Kansas

5/27/68

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Flint Engineering and Const. Co.
Address 2375 W. Central El Dorado, Kansas


STATE OF Kansas, COUNTY OF Butler, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *[Signature]*

(Address)

SUBSCRIBED AND SWORN TO before me this 23 day of May 19 68

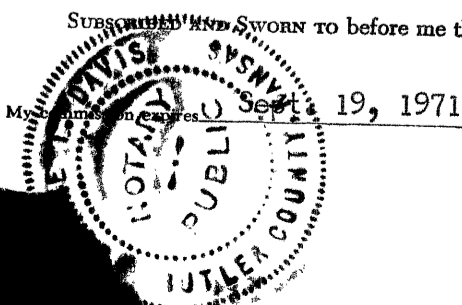

[Signature]

Notary Public.

10 - Nos - 03723 - 50 - 50
 K. G.
Formation Record

Lease **H. M. Russ #1**

Well No. **1**

FROM	TO	KIND	HARDNESS	COLOR	REMARKS
0	8	Cellar			
8	60	Sand Rock			
60	75	Clay			
75	740	Shale & shells			
740	814	Pirities of iron & shale			
814	957	Sand & shale			
957	970	Shale			
970	1010	Sand			
1010	1180	Shale & red rock			
1180	1235	Shale & shells - set 10-3/4" csg.			
1235	1299	Shale & red bed			
1299	1355	Anhydrite			
1355	1510	Red bed & shells			
1510	1615	Sandy shale & shells			
1615	1705	Salt			
1705	1755	Lime			
1755	1882	Shale & lime			
1882	1920	Shale & shells			
1920	1950	Lime			
1950	2002	Lime & shale			
2002	2080	Shale & shells			
2080	2170	Lime & shale			
2170	2200	Lime			
2200	2240	Shale & shells			
2240	2260	Lime			
2260	2325	Lime & shale			
2325	2355	Lime			
2355	2372	Sand			
2372	2415	Lime			
2415	2482	Shale			
2482	2519	Lime & shale			
2519	2622	Lime			
2622	2782	Shale & shells			
2782	2841	Lime & shale			
2841	2860	Shale & shells			
2860	2880	Lime & shale			
2880	3140	Lime - Topeka			
3140	3155	Lime & shale			
3155	3201	Lime			
3201	3216	Lime & shale			
3216	3242	Lime - Set 7"			
3242	3260	Lime - Show of oil & water @ 3260			
3260	3330	Lime - More water and show oil 3310-19			
3330	3335	Lime - Oil & water			
3335	3345	Lime - more oil & water			
3345	3356	Lime			
3356	3371	Lime - dry			
3371	3381	Shale - caving			
3381	3410	Shale - Top silicious 3409			
3410	3420	Lime - 1st show 3415-17, more from 3417-20' Oil			

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 22 1968
 CONSERVATION DIVISION
 Wichita, Kansas

5/22/68