


15-163-20594-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

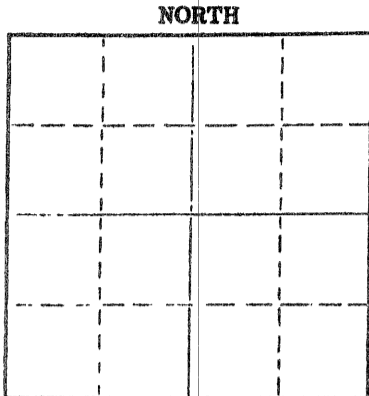

Locate well correctly on above Section Plot

Rooks \_\_\_\_\_ County. Sec. 33 Twp. 8 Rge. 17 (E) W (W)  
Location as "NE/CNW&SW&S" or footage from lines. NE NE SE  
Lease Owner Dreiling Oil, Inc.  
Lease Name McMullen Well No. 1  
Office Address Rt. #1 - Box 28, Victoria, KS 67671  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 1-4 1976  
Application for plugging filed 1-4 1976  
Application for plugging approved 1-4 1976  
Plugging commenced 1-4 1976  
Plugging completed 1-4 1976  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, KS 67601  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3,500 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8 5/8"	128'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st plug was set @ 550' w/50 sacks cement  
2nd plug was set @ 150' w/25 sacks cement  
3rd plug was set @ 40' w/10 sacks cement

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Dreiling Oil, Inc.  
Address Rt. #1 - Box 28, Victoria, KS 67671

STATE OF KANSAS COUNTY OF ELLIS, ss.

I, Joseph A. Hess, Sec. Treas. of Drlg. Contrs. of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joseph A. Hess  
JOSEPH A. HESS, Hays, KS 67601  
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of January, 1976  
Cecilia Basgall  
Cecilia Basgall  
Notary Public.



RECEIVED  
STATE CORPORATION COMMISSION  
JAN 12 1976 1/12/76  
CONSERVATION DIVISION  
Wichita, Kansas

# DREILING OIL, INC.

15-163-20594-00-00

Victoria, Kansas 67671

## WELL LOG

Company	Dreiling Oil, Inc. Rt. #1 - Box 28 Victoria, KS 67671	No. 1	Sec. 33	Twp. 8	Ang. 17
Farm	McMullen		Location	NE NE SE	
Total Depth	3,50-		County	Rooks	
Comm.	12-29-75	Comp. 1-4-76	Elevation:	2021	K. B.
Contractor	Dreiling Oil, Inc. Rt. #1 - Box 28 Victoria, KS 67671			2018	D. F.
				2016	G. R.

Casing Record  
128' - 8 5/8"

Cement Record  
85 sacks cement

Production:  
D & A

Figures Indicate Bottom of Formations

0'	30'	Top Soil - Clay
30'	1260'	Shale
1260'	1342'	Shale
1342'	1380'	Anhydrite
1380'	1978'	Shale
1978'	3053'	Shale & Lime
3053'	3500'	Lime
3500'	T.D.	

STATE OF KANSAS)  
COUNTY OF ELLIS)

I, Joseph A. Hess, Secretary Treasurer of Dreiling Oil, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from the McMullen #1.

*Joseph A. Hess*  
JOSEPH A. HESS

Subscribed and sworn to before me this 9th day of January, 1976.

*Cecilia Basgall*  
Cecilia Basgall Notary Public

My commission expires: September 13, 1976.

JAN 18 1976

1/12/76