


15-163-20816-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

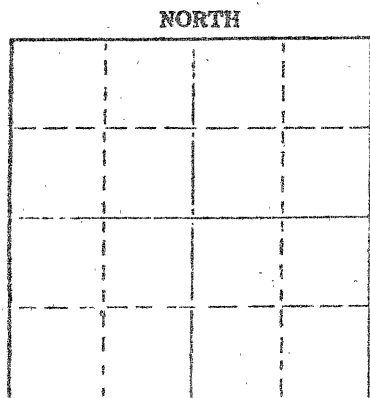

Locate well correctly on above Section Plat

Rooks County, Sec. 33 Twp 8 Rge. 17 (E)W (W)  
Location as "NE/CNWKSW" or footage from lines E/2 SE/4 NW/4  
Lease Owner Black Petroleum Co.  
Lease Name Stamper-Bemis "A" Well No. 1  
Office Address Suite 545 Olive W. Garvey Bldg., Wichita, Ks.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed 7-5 1978  
Application for plugging filed 7-5 1978  
Application for plugging approved 7-5 1978  
Plugging commenced 7-5 1978  
Plugging completed 7-5 1978  
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3,449 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	264'	Cmtd. w/155 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Fill hole w/heavy mud  
Set bridge plug @550'  
Pump 70 sax cement on plug thru 4 1/2" drill pipe  
Fill hole w/heavy mud  
Set bridge plug @240'  
Pump 20 sax cement on plug thru 4 1/2" drill pipe  
Set bridge plug @40' w/1/2 sax hulls on plug  
Dump 10 sax cement on plug to cellar

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 11 1978  
7/11/78  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Shields Drilling Co., Inc.  
Address Shields Bldg., Russell, Kansas 67665

STATE OF KANSAS COUNTY OF RUSSELL  
R.L. Shields ss. contractor  
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R.L. Shields  
Shields Bldg., Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of July 1978

My commission expires Aug 26, 1979  
Ruth Phillips Notary Public.



Shields


15-163-20816-0000

Russell, Kansas

WELL LOG

Operator: Black Petroleum Company  
 Well: Stamper-Bemis "A" #1  
 Commenced: June 26, 1978  
 Completed: July 5, 1978  
 Contractor: Shields Drilling Co., Inc.

Well Description: E/2 ~~SE/4~~ NW/4  
 Sec. 33-8S-17W  
 Rooks Co., Kansas



Elevation:  
 Treatment:  
 Production: D & A  
 Tops:

CASING RECORD

Size	Run	Pulled
8 5/8"	264'	Cmtd. w/155 sax

..... Figures Indicate Bottom of Formations .....

Surface clay & post rock	40'
Blue Shale	271'
Shale & shells	565'
Shale	736'
Sand	1,010'
Shale	1,300'
Anhydrite	1,338'
Shale & shells	1,382'
Shale & lime	2,797'
Lime	3,449' RTD

RECEIVED  
 STATE CONSERVATION DIVISION

JUL 11 1978

CONSERVATION DIVISION  
 Wichita, Kansas

7/11/78

Notes