

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-175-22066-01-00  
Spot: E2NESENE Sec/Twnshp/Rge: 1-34S-33W  
1650 feet from N Section Line, 175 feet from E Section Line  
Lease Name: LANORA Well #: 1 1H  
County: SEWARD Total Vertical Depth: 7601 feet

Operator License No.: 5278  
Op Name: EOG RESOURCES, INC.  
Address: 3817 NW EXPRESSWAY STE 500  
OKLAHOMA CITY, OK 73112

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		5418		WITH 2 SX CMT
COND	9.625	1680		WITH 450 SX CMT
PROD	4.5	7601	3915	WITH 120 SX CMT <b>247.03</b>
SURF	7	6385	2315	WITH 155 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/27/2007 10:00 AM  
Plug Co. License No.: 33338 Plug Co. Name: ORR ENTERPRISES, INC.  
Proposal Rcvd. from: TERRY MAXWELL Company: EOG RESOURCES Phone: (405) 246-3126

Proposed Plugging Method: CIBP @ 5418' WITH 2 SX CMT. LAY DOWN 4 1/2". GO BACK IN WITH TBG. PLUG AT 5000' +/- WITH 40 SX CMT. CUT 7". PUMP 50 SX CMT. CUT OFF THROUGH TBG. PLUG AT 1680' WITH 100 SX CMT. PLUG AT 610' WITH 50 SX CMT. PLUG AT 40-0' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 11/29/2007 1:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 5418' WITH 2 SX CMT. 1ST PLUG 40 SX CMT AT 3910' ON 4 1/2" STUB THROUGH TBG. 2ND PLUG 50 SX CMT AT 2300' ON 7" STUB THROUGH TBG. 3RD PLUG AT 1765' WITH 100 SX CMT. 4TH PLUG AT 605' WITH 50 SX CMT. 5TH PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
6469	7417		

**INVOICED**  
DATE 1-10-08  
INV. NO. 2008061033

RECEIVED  
KANSAS CORPORATION COMMISSION


**JAN 04 2008**

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED CLASS C CMT BY ORR ENTERPRISES.

Plugged through: TBG

District: 01

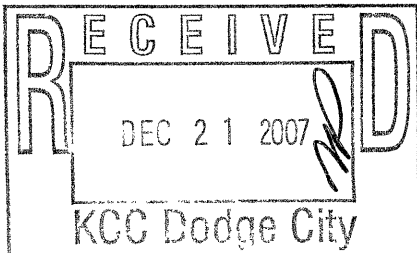

Signed

*Steve Durrant*

(TECHNICIAN)

*PRJ*