

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-093-10001-00-00

Spot: <sup>NW</sup> ~~NE~~SW

Sec/Twnshp/Rge: 31-22S-35W

1250 feet from S Section Line,

1250 feet from ~~W~~ Section Line

Lease Name: FOSTER

Well #: 1

County: KEARNY

Total Vertical Depth: 2685 feet

KCC Agent  
per  
GPS

Operator License No.: 8061  
Op Name: OIL PRODUCERS INC. OF KANSAS  
Address: 1710 WATERFRONT PKWY  
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		2498		
L1		2685		
PROD 7		2585	0	WITH 100 SX CMT <u>87.26</u>
SURF 10.75		248		WITH 150 SX CMT

Well Type: GAS

UIC Docket No:

Date/Time to Plug: 11/28/2007 8:00 AM

Plug Co. License No.: 31925

Plug Co. Name: QUALITY WELL SERVICE, INC.

Proposal Rcvd. from:

Company:

Phone:

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: KEN JEHLIK

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 12/14/2007 3:30 PM

KCC Agent: KEN JEHLIK

Actual Plugging Report:

1ST PLUG CIBP @ 2498'. 11/28/07: 2ND PLUG PERFORATE 5 1/2" @ 950'. SET CMT RETAINER AT 930' & PUMP 130 SX CMT. 3RD PLUG STING OUT OF RETAINER & PUMP 95 SX CMT UP 7" CASING. TOC @ 310'. 4TH PLUG RUN TBG TO 310' CIRCULATE CMT TO SURFACE WITH 40 SX CMT. 12/14/07: 4TH PLUG MIRU QUALITY WELL SERVICE. PUMP 75 SX CMT DOWN 10 3/4" X 5 1/2" ANNULUS. TOP OFF 5 1/2" 5 SX CMT.

Perfs:

Top	Bot	Thru	Comments
2578	2668		


**INVOICED**  
DATE 1-10-08  
INV. NO. 2008061039

RECEIVED  
KANSAS CORPORATION COMMISSION  
**JAN 04 2008**  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY & QUALITY

Plugged through: TBG

District: 01

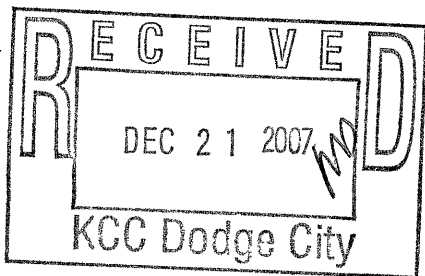

Signed

Steve Durand  
(TECHNICIAN)

PKT