

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-175-21184-00-00  
Spot: NESW Sec/Twnshp/Rge: 18-31S-34W  
1980 feet from S Section Line, 3300 feet from E Section Line  
Lease Name: ROONEY A Well #: 1-18  
County: SEWARD Total Vertical Depth: 5786 feet

Operator License No.: 5003  
Op Name: MCCOY PETROLEUM CORPORATION  
Address: 8080 E CENTRAL STE 300  
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
DVT		3222		275 SX
PROD	4.5	5782	2060	WITH 250 SX CMT <b>188.05</b>
SURF	8.625	1738		WITH 650 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 01/03/2007 12:30 PM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: PUMP 40 SX CMT ON BOTTOM. PLUG AT 1800' WITH 15 SX GEL & 50 SX CMT. PLUG AT 900' WITH 50 SX CMT. PLUG AT 40' WITH 40 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN  
Date/Time Plugging Completed: 01/03/2008 2:30 PM

Witness Type: COMPLETE (100%)  
KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

40 SX CMT PUMPED TO 5000'. PRESSURED TO 250# & HELD. 1ST PLUG AT 1800' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 900' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 40 SX CMT. CMT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
5300	5304		

**INVOICED**  
DATE 1-16-08  
INV. NO. 2008061065


RECEIVED  
KANSAS CORPORATION COMMISSION  
**JAN 11 2008**

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY CEMENTING.

Plugged through: CSG

CONSERVATION DIVISION  
WICHITA, KS

District: 01

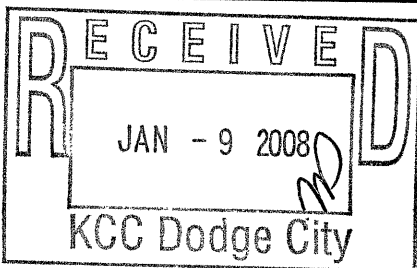

Signed

*Jerry W Stapleton*  
per JT

(TECHNICIAN)

Form CP 973

*JT*