


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

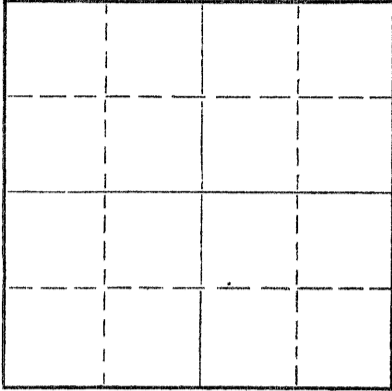

Locate well correctly on above
Section Plat

Sedgwick County. Sec. #1 Twp. 26 Rge. 2E (E) ~~(W)~~
Location as "NE/CNW/SW" or footage from lines NW SW SE
Lease Owner Morgenstern & Specter
Lease Name Edson Well No. 2
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 3-7-57
Application for plugging filed July 5, 1964
Application for plugging approved July 6, 1964
Plugging commenced July 17, 1964
Plugging completed July 18, 1964
Reason for abandonment of well or producing formation failure to produce profitably

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Paul Turpin Clearwater, Kansas
Producing formation Mississippi chert Depth to top 2820 Bottom 2834 Total Depth of Well 2835 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	106	none
				5 1/2	2861 ft.	2332 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged, back with sand to 2850-feet, dumped 5- sacks cement.
Set a ten foot Rock Bridge at 175- feet, dumped 25- sacks cement.
Mudded hole up to 25-feet, dumped ten sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

JUL 27 1964
7-27-64
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor LYNCH CASING PULLING, COMPANY. NO. 457
Address R.R. #4 GREAT BEND, KANSAS

STATE OF Kansas, COUNTY OF Russell, ss.
Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Morgenstern & Specter
Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of July, 1964

My commission expires Dec 1, 1964
Eddie Landy
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

Company- BEDELL-CATT DRILG. CO.
Farm- Edson No. 2

SEC. 1 T. 26 R. 2E
NW SW SE

Total Depth. 2835'
Comm. 2-26-57 Comp. 3-7-57
Shot or Treated.
Contractor. Bedell-Catt Drilg. Co.
Issued. 5-11-57

County Sedgwick
KANSAS



CASING:
8 5/8" 106'
5 1/2" 2861' w/75 sx cem.

Elevation. 1331' RB

Production. 25 B0

Figures indicate Bottom of Formations.

surface hole	106
lime-shale	780
shale-shells	1170
shale	1380
lime-shale	1580
lime	1680
lime-shale	2325
shale	2335
lime	2387
lime-shale	2790
chat	2810
Mississippi lime	2824
lime-chert	2861 RTD.
lime-chert	2835
Total Depth	

TOPS: Scout	
Kansas City	2336
B/Kansas City	2501
Marmaton	2564
Mississippi	2780
Mississippi chat	2820

RECEIVED
STATE CORPORATION COMMISSION

JUL 8 1964

CONSERVATION DIVISION
Wichita, Kansas