

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Graham County, Sec. 8 Twp. 8 Rge. 23 (E) (W) X
Location as "NE/CNW/SW" or footage from lines Center NE/4
Lease Owner John O. Farmer
Lease Name Montgomery Well No. 3
Office Address 370 W. Wichita Russell, Kansas 67556
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced January 24, 1973
Plugging completed February 3, 1973
Reason for abandonment of well or producing formation Depleted

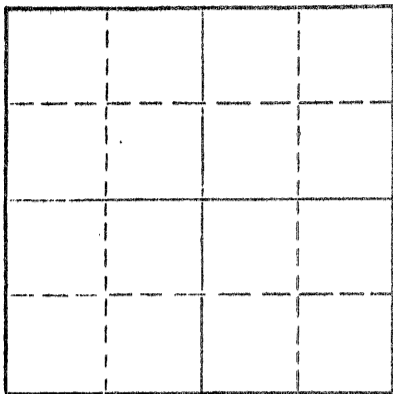

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation Depth to top Bottom Total Depth of Well 3765 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|-------|--------|------------|
| | | | | 8 5/8 | 166 | None |
| | | | | 5 1/2 | 3764 | 1394.18' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Measured T. D. at 3740'. Pushed a plug to 3550'. Dumped 25' sand and 5 sacks cement. Shot casing at 2000, 1800, 1600, 1500 and 1400 ft. Pulled a total of 45 joints of 5 1/2" casing. Allied squeezed well with 5 sacks hulls, 30 sacks gel and 100 sacks 50/50 pozmix with 6% added gel.

RECEIVED
STATE CORPORATION COMMISSION

FEB 26 1973
2-26-1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.
Address P. O. Bo 698 Great Bend, Kansas 67530


STATE OF KANSAS, COUNTY OF BARTON, SS.
JAMES W. ROCKHOLD

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

James W. Rockhold

Box 690 Great Bend, Ks. 67530 James W. Rockhold
(Address)

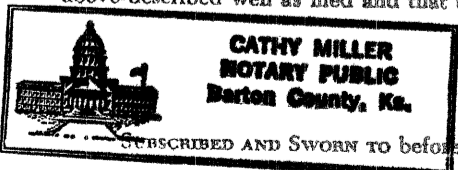

Subscribed and sworn to before me this 23 day of February, 1973

Cathy Miller
Cathy Miller Notary Public

My commission expires September 30, 1975

