

STATE OF KANSAS
STATE CORPORATION COMMISSION

15-065-00554-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Graham County. Sec. 18 Twp. 8S Rge. 23 (E) W (W)

Location as "NE/CNW&SW&" or footage from lines NW NE NW

Lease Owner R. W. Shields

Lease Name Gates Well No. 1

Office Address 308 Rule Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 28 19 58

Application for plugging filed May 28 19 58

Application for plugging approved May 28 19 58


Plugging commenced May 28 19 58

Plugging completed May 28 19 58

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

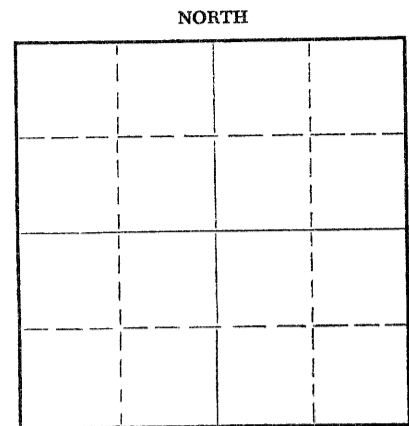

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius, Hill City, Kansas

Producing formation Depth to top Bottom Total Depth of Well 3790 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	198	8 5/8"	198	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

From 3790' to 500' - heavy rotary mud
500' to 421' - plug, 25 sacks cement
421' to 190' - heavy rotary mud
190' to 142' - plug, 15 sacks cement
142' to 40' - heavy rotary mud
40' to 6' - plug, 10 sacks cement
6' to 0' - cellar

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor PEEL BROTHERS, INC.
Address P.O. Box 88, Hoisington, Kansas

6-10-58

STATE OF KANSAS, COUNTY OF BARTON, ss.
PEEL BROTHERS, INC. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. PEEL BROTHERS, INC.

(Signature) BY Dale H. Matlock
P.O. Box 88, Hoisington, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of May, 19 58

Ruth Brank
Notary Public.

My commission expires April 27, 1960

PLUGGING
FILE SEC 18 T 8 R 23W
BOOK PAGE 105 LINE 5

DRILLERS' LOG

Well Owner:	R. W. Shields	NW NE NW
Farm Name:	Gates Well No. 1	Sec. 18-8S-23W
Commenced:	5/21/58	Graham County, Kansas
Completed:	5/28/58	Elevation:
Total Depth:	3790'	Production: Dry
Casing:	8 5/8" @ 198' cemented	
Contractor:	Peel Brothers, Inc.	

The figures below indicate bottoms of formations:

Clay and shale	0	198
Shale and shell		1050
Sand		1250
Shale and shells		1500
Red bed and shale		1960
Anhydrite		1990
Shale		2330
Shale and lime		2540
Lime		2685
Lime and shale		3470
Lime and chert		3575
Lime		3790
Total Depth		3790

This is to certify that the above information is to the best of our knowledge true and correct.


PEEL BROTHERS, INC.

BY *Joseph Matthews*

SUBSCRIBED AND SWORN to before me this 29th day of May, 1958

My commission expires: April 27, 1960

Rich Brant
Notary Public

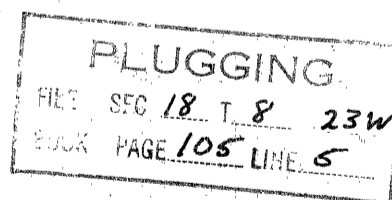

6-10-58