


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

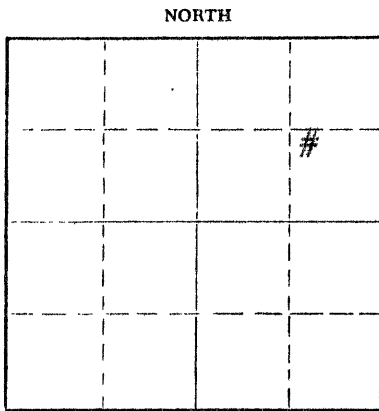

Locate well correctly on above
Section Plat

Graham County, Sec. 19 Twp. 8 Rge. 20 ^{23w} (E)W (W)
Location as "NE/CNWxSWx" or footage from lines NE/SE/NE
Lease Owner Leo J. Dreiling Oil Co.
Lease Name Brinkmeyer Well No. 1
Office Address Victoria, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ Oct. 7, 1964
Application for plugging approved _____ Oct. 10, 1964
Plugging commenced _____ Oct. 21, 1964
Plugging completed _____ Oct. 23, 1964
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W.L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3740' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	192'	None
				5 1/2	3740'	2090'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand from 3719' to 3670'. Mixed and dumped 5 sx. of cement from 3670' to 3630'. Pulled casing to # 450'. Mixed and circulated 12 sx. of gel mud. Mixed and pumped in 20 sx. of cement from 450' to 390'. Pulled casing to 180'. Mixed and pumped in 20 sx. of cement from 180' to 120'. Pulled rest of casing. Bailed off gel mud to 40'. Set 10' rock bridge from 40' to 30'. Mixed and dumped 10 sx. of cement from 30' to base of the cellar.

RECEIVED
STATE CORPORATION COMMISSION

NOV 3 1964

11/2/64

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ace Pipe Pulling Co.
Address Box 304 Great Bend, Ks.

STATE OF _____, COUNTY OF _____, ss.

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leo Dreiling

(Address)

SUBSCRIBED AND SWORN to before me this 30th day of October, 1964

My commission expires Jan 10, 1965

Robert Dreiling
Notary Public.

15-065-02982-00-00


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company: LEO J. DRELLING OIL CO.
Farm: Brinkmeyer No. 1

SEC. 19 ^{SE} T. 8 R. 23W
NE NE NE

Total Depth. 3740'
Comm. 5-5-57 Comp. 5-15-57
Shot or Treated.
Contractor. Sidey Drig. Co.
Issued. 9-13-58

County Graham
KANSAS



Elevation. 2193' RB

Production. 80 BOPD

Figures Indicate Bottom of Formations.

sand & shale	192
shale	400
shale & shells	1160
white sand	1180
shale & shells	1275
shale, red bed, shells	1455
shale	1460
sand	1590
shale	1605
sand	1650
red bed & shale	1895
Anhydrite	1935
shale & broken lime	2150
shale & lime	2360
lime & shale	2665
broken lime	2775
lime & shale	2925
lime	3085
shale & lime streaks	3140
lime & shale	3325
sandy lime	3355
lime	3709
lime	3740 RTD
Total Depth	

TOPS: SCOUT	
Heebner	3500
Lansing	3538

11/3/64

RECEIVED
STATE CORPORATION COMMISSION

NOV 3 1964

CONSERVATION DIVISION
Wichita, Kansas