

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-119-20906-00-00
Spot: SESE Sec/Twnshp/Rge: 19-34S-27W
660 feet from S Section Line, 660 feet from E Section Line
Lease Name: BARRAGREE Well #: 2-19
County: MEADE Total Vertical Depth: 3300 feet

Operator License No.: 32302
Op Name: KEY GAS CORP.
Address: 505 S BROADWAY STE 200
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	3330	2640	WITH 150 SX CMT
SURF	8.625	773		WITH 370 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 01/11/2008 9:30 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: BILL TATRO Company: MID AMERICA PRODUCTION MG Phone: 107.25

Proposed Plugging Method: SET CIBP @ 3120' WITH 2 SX CMT OR SAND BACK TO 3120' WITH 4 SX CMT. PLUG AT 800' WITH 15 SX GEL & 50 SX CMT. PLUG AT 400' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 01/11/2008 11:15 AM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

SAND TO 3120' & 4 SX CMT WITH DUMP BAILER. 1ST PLUG AT 1350' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 830' WITH 50 SX CMT. 3RD PLUG AT 400' WITH 40 SX CMT. 4TH PLUG AT 40' WITH 30 SX CMT. CMT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
3208	3212		
3171	3177		


INVOICED
DATE 1-23-08
INV. NO. 2008061100

RECEIVED
KANSAS CORPORATION COMMISSION
JAN 17 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND ACID & CMT.

Plugged through: CSG

District: 01

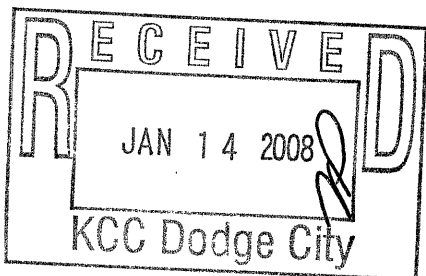

Signed

Jerry W. Stapleton
(TECHNICIAN)
PIRT JT