

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-145-20684-00-01
Spot: NWNWNW Sec/Twnshp/Rge: 35-23S-18W
420 feet from N Section Line, 330 feet from W Section Line
Lease Name: SPENCE A OWWO Well #: 2
County: PAWNEE Total Vertical Depth: 4122 feet

Operator License No.: 3911
Op Name: RAMA OPERATING CO., INC.
Address: 101 S MAIN ST
STAFFORD, KS 67578

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4249	0	WITH 125 SX CMT
SURF	8.625	323		WITH 300 SX CMT

133.97

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 01/09/2008 9:00 AM

Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.

Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC. Phone: (620) 938-2537

Proposed Plugging Method: 4 SX CMT AT 3880'. PLUG AT 1170' WITH 10 SX GEL & 50 SX CMT. PLUG AT 360' WITH 50 SX CMT. PLUG AT 40-0' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 01/09/2008 4:30 PM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

Perfs:

IN 1998 PERFORATED AT 1150' & CMT CIRCULATED UP 8 5/8" X 4 1/2" ANNULUS. SANDED TO 3880' & 4 SX CMT WITH DUMP BAILER. CUT 4 1/2" AT 1190' WITH RIPPER. PRESSURED 4 1/2" TO 1500 PSIG. FOUND 4 1/2" HAD BEEN CEMENTED IN. RAN 2 3/8" TUBING TO 1200'. PUMPED 100 SX CMT CIRCULATING TO 0' UP 4 1/2". PULLED TUBING OUT AND TOPPED OFF 4 1/2" WITH 20 SX CMT. RAN 1" TUBING IN 8 5/8" X 4 1/2" ANNULUS. FOUND CMT AT 120'. PULLED TUBING TO 100' CIRCULATED TO SURFACE WITH 30 SX CMT.

Top	Bot	Thru	Comments
4044	4056		
4002	4009		
3932	3936		

INVOICED

DATE 1-23-08

INV. NO. 200806113

RECEIVED
KANSAS CORPORATION COMMISSION


JAN 16 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND.

Plugged through: CSG

District: 01

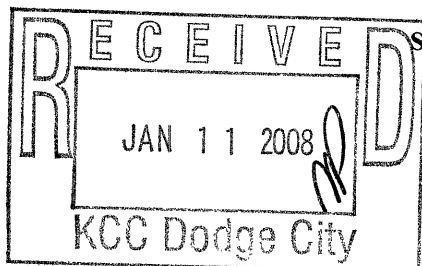

Signed

Richard W. Lacey

(TECHNICIAN)

Form CP-23

PKT