

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-083-21279-00-00  
Spot: NESWSW Sec/Twnshp/Rge: 9-24S-22W  
990 feet from S Section Line, 4290 feet from E Section Line  
Lease Name: HALL Well #: 6  
County: HODGEMAN Total Vertical Depth: 4665 feet

Operator License No.: 5011  
Op Name: VIKING RESOURCES, INC  
Address: 105 S BROADWAY STE 730  
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4659	0	WITH 500 SX CMT
SURF	8.625	294		WITH 165 SX CMT

151.61

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 01/14/2008 12:00 PM  
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY  
Proposal Rcvd. from: SHAWN DEVLIN Company: VIKING RESOURCES Phone: (316) 262-2502

Proposed Plugging Method: PUMP FROM TOP 400# HLLS - 50 SX CMT - GEL SPACER TO 1500'. CMT . 1500'-0'.

Plugging Proposal Received By: RICHARD LACEY Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 01/14/2008 3:15 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

\*\* 100 SX CMT PUMPED DOWN 8 5/8" X 5 1/2" DONE WHEN WELL WAS COMPLETED.\*\* PUMPED 400# HULLS & 50 SX CMT WITH 18 SX GEL THEN 185 SX CMT. PRESSURED TO 500#. TIED ONTO BACKSIDE AND PUMPED 15 SX CMT. PRESSURED TO 500# & HELD.

Perfs:

Top	Bot	Thru	Comments
4659	4665	OH	

INVOICED

DATE 1-30-08  
INV. NO. 2008061142

RECEIVED  
KANSAS CORPORATION COMMISSION


JAN 28 2008

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4 % GEL BY ALLIED.

Plugged through: CSG

District: 01

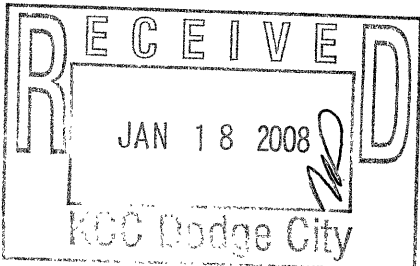

Signed

Michael Maier  
(TECHNICIAN)

pet