

15-173-03655-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

We also need a well log on this well


Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Sedgwick County, Sec. 14 Twp. 26 Rge. 2E (E) 11(W)  
Location as "NE/CNW/SW" or footage from lines ~~NE NE NE~~ NE SE NE ~~NE~~  
Lease Owner Warren R. Winne Oil  
Lease Name Borg Well No. 5  
Office Address 5503 E. Kellogg - Wichita, Kans.  
Character of Well (completed as Oil, Gas or Dry Hole) D&A  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed 5/9/60 19  
Application for plugging approved 5/9/60 19  
Plugging commenced 5/9/60 19  
Plugging completed 5/9/60 19  
Reason for abandonment of well or producing formation \_\_\_\_\_

NORTH

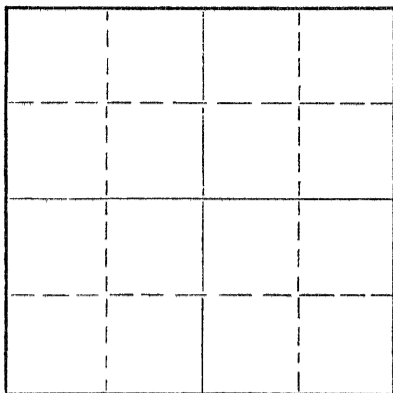

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Lee Guthrie  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2890' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

2880' 4 1/2" Pipe set with 100 sacks cement. 150' 8 5/8" surface pipe set with 150 sacks cement. Hole filled to 2870' with sand and 5 sacks cement. at 200' set 20' rock bridge and 15 sacks cement mud to 35' set Rock Bridge and 10 sacks cement which filled hole to plow surface. Recovered 2313' 4 1/2" Pipe.

RECEIVED  
STATE CORPORATION COMMISSION  
9/17/63  
SEP 17 1963

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Art Lamb Casing Pulling Company  
Address P. O. Box 983 -- Hutchinson, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss. \_\_\_\_\_ (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Warren R. Winne  
5503 E. Kellogg  
(Address)

SUBSCRIBED AND SWORN to before me this 13 day of September 19 63

My commission expires 6-14-64 Maiguis Hatch Notary Public.

15-173-03655-00-00

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas,

9

Company- WINNE OIL CO,  
Farm- Borg

No. 5

SEC. 14 T. 26  
NE SE NE

R. 2E

Total Depth. 2885'

Comm. 9-10-57


Comp. 10-11-57

County Sedgwick  
KANSAS

Shot or Treated.

Contractor. Winne Oil Co.

Issued. 3-25-61



CASING:

8" 150'

4" 2880'

Elevation. 1372' RB

Production. 25 BOPD

Figures Indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE.

TOPS: SCOUT

Kansas City 2408

B/Kansas City 2570

Mississippi 2844

Chat 2881