


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

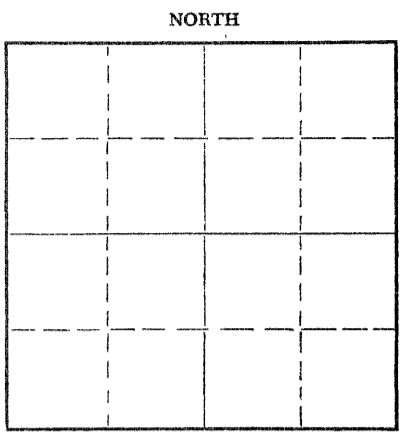

Locate well correctly on above Section Plat

Sedgwick County. Sec. 14 Twp. 26 Rge. 2 (E) (W)  
Location as "NE/CNW/SW" or footage from lines NE/NW/NE  
Lease Owner Bedell-Catt Drilling Company, Inc.  
Lease Name Borg Well No. #1  
Office Address 601 Union Center, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed Yes 19\_\_\_\_  
Application for plugging approved Yes 19\_\_\_\_  
Plugging commenced \_\_\_\_\_ 8-27 1957  
Plugging completed \_\_\_\_\_ 8-29 1957  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Ruel Durkee  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2898' Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		2,394'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Measured into TD 2898'.  
Plugging started 8-27-57. Finished 8-29-57.  
Plugged off bottom with sand to 2880' and dumped 6 sacks cement with bailer. Shot 5 1/2" casing at 2,394'. Pulled pipe out of hole and plugged well with mud to 100' and set permanent rock bridge. Dumped 15 sacks cement. Filled hole with mud to 15' and mixed 5 sacks for cap on well. Well completed.



Name of Plugging Contractor J.O. Forbes d/b/a Forbes Casing Pulling Co.  
Address Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
J.O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J.O. Forbes  
Box 221, Great Bend, Kans. (Address)

SUBSCRIBED AND SWORN TO before me this 29th day of August, 1957.  
Betty S. Edman

My commission expires November 8, 1960. Notary Public.

PLUGGING  
FILE SEC. 14 T. 26 R. 2E  
BOOK PAGE 40 LINE 6

## DRILLING LOG

Company: Bedell-Catt Drilling Co., Inc.  
601 Union Center  
Wichita 2, Kansas

Lease: Borg

Well: #1

Location: NE NW NE of Section 14, Township 26, Range 2 East,  
Sedgwick County, Kansas

Contractor: Bedell-Catt Drilling Co., Inc.  
601 Union Center  
Wichita 2, Kansas

Date Comm: January 1, 1957

Date Comp: January 9, 1957

T. D.: 2898'

Production:

Casing: 8-5/8" to 115'/110 sacks cement  
3 sacks CC  
5-1/2" to 2892'/50 sacks cement

Figures Indicate the Bottom of Formation

0-115	Surface Hole
124	lime
2215	Shale & lime
2560	lime
2860	lime & shale
2898	lime & chert
2898'	T.D.

I certify the above to be true and correct to the best of my knowledge and belief.

BEDELL-CATT DRILLING CO., INC.

By *Carl S. Bedell*  
Carl S. Bedell

Subscribed and sworn before me this 17th day of January, 1957.

*Francis E. Hebbler*  
Notary Public

My Commission Expires;

March 18, 1958

PLUGGING	
FILE SEC.	14 T. 26 R. 2E
BOOK PAGE	40 LINE 6

RECEIVED  
SEP 4 1957  
OIL & GAS DIVISION  
KANSAS