


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

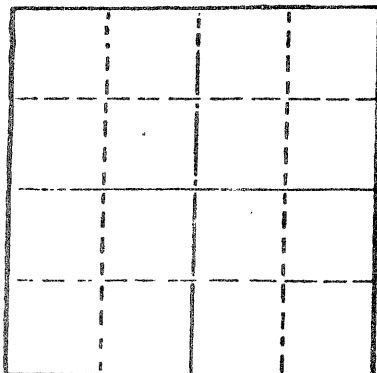

Locate well correctly on above
Section Plat

Graham County, Sec. 33 Twp. 8 Rge. 21 E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
C W/2 SE NW
Lease Owner John B. Collins
Lease Name Fountain Well No. #1
Office Address 1007 Cody, Suite A, Hays, Kansas 67601
Character of Well (Completed as Oil, Gas or Dry Hole)
Oil
Date Well completed 12-11 1970
Application for plugging filed 10-13 1978
Application for plugging approved 10-18 1978
Plugging commenced 10-30 1978
Plugging completed 10-30 1978
Reason for abandonment of well or producing formation
Low production
If a producing well is abandoned, date of last production
10-1 1978

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation Arbuckle Depth to top 3700 Bottom 3727 Total Depth of Well 3738
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	250	None
				4 1/2	3729	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

250' -- 8 5/8" Surface Casing - cement circulated with 175 sx.
3729' -- 4 1/2" Production casing cement with 150 sx. No plug-back, open hole completion.
2 Stage Collar set @ 1675' and cement circulated to surface with 450 sx. Squeezed 4 1/2"
casing with 2 sx hulls, followed with 60 sx cement, 6% gel - finished job - 300 lb pressure.

STATE CORPORATION COMMISSION
NOV 13 1978
NOV 23 1978
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing Co., Inc.


STATE OF KANSAS COUNTY OF ELLIS, ss.
John B. Collins (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) John B. Collins
1007 Cody, Suite A, Hays, Kansas 67601
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of November, 1978

My commission expires



Arilla A. Mizell
Notary Public.