


STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 CONSERVATION DIVISION  
 P. O. BOX 17027  
 WICHITA, KANSAS 67217

WELL PLUGGING RECORD

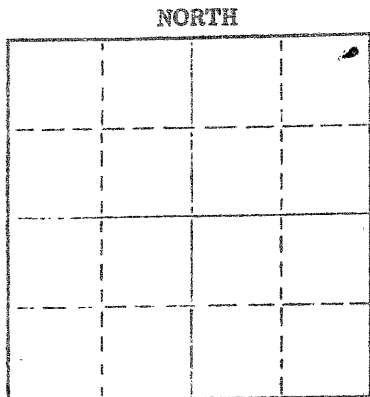

Locate well correctly on above Section Plat

Graham County, Sec. 5 Twp. 8S Rge. 22 (W)  
 Location as "NE/CNW/SE/SW" or footage from lines NE NE NE  
 Lease Owner Andover oil Company  
 Lease Name Dunwoody Well No. 1  
 Office Address 912 Philtower Bldg, Tulsa, Oklahoma 74103  
 Character of Well (completed as Oil, Gas or Dry Hole) oil  
 Date well completed April 9 19 52  
 Application for plugging filed December 10 19 75  
 Application for plugging approved December 10 (verbal) 19 75  
 Plugging commenced December 10 19 75  
 Plugging completed December 10 19 75  
 Reason for abandonment of well or producing formation depleted  
 If a producing well is abandoned, date of last production unknown 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor  
 Producing formation Lansing Depth to top 3485 Bottom 3547 Total Depth of Well 3767 Feet  
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing	Unknown	--	--	8-5/8	203'	none
				5-1/2	3752'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 0 feet to 689 feet for each plug set.

Cement was pumped via 5-1/2" csg using 80 sks regular cement from surface to 689'.

Note: 5-1/2" 14# csg was cemented through stage collar at 1838' at time of initial completion. Cement was circulated to surface

Name of Plugging Contractor Allied Cementers (If additional description is necessary, use BACK of this sheet)  
 Address Plainville, Kansas DEC 23, 1975

STATE OF Oklahoma COUNTY OF Tulsa, ss.

Bobby Young (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bobby Young  
 912 Philtower Building, Tulsa, OK 74103  
 (Address)

Subscribed and sworn to before me this 19 day of December 19 75

My Commission Expires May, 15 1976 Sharon L Banks Notary Public.