


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

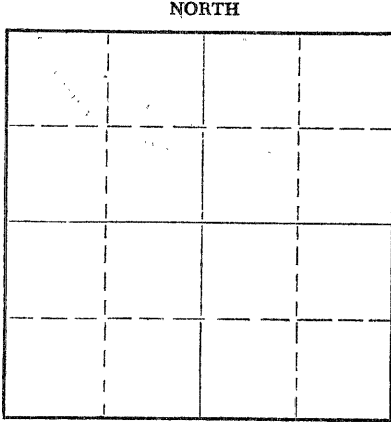

Locate well correctly on above  
Section Plat

Sedgwick County, Sec. 5 Twp. 26S Rge. 2E (E) (W)  
Location as "NE/CNW&SW" or footage from lines 200' W 200' S SW/4  
Lease Owner KATHOL PETROLEUM, INC.  
Lease Name Broers Well No. 4  
Office Address 900 Sutton Place, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) ~~SWP~~ OIL rec. oil  
Date well completed 4/2/55 19\_\_  
Application for plugging filed 2/21/69 19\_\_  
Application for plugging approved 2/24/69 19\_\_  
Plugging commenced 3/18/69 19\_\_  
Plugging completed 3/27/69 19\_\_  
Reason for abandonment of well or producing formation Abandon lease

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ted E. Dewey 3009'  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3004 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	97'	None
				5 1/2"	3004'	2610'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Place 5 sx cement at 3009' to 2974'. Bail hole to 200', set rock bridge to 180'. Dump 5 1/2 yds. Redi Mix Cement to Surface.

RECEIVED  
STATE CORPORATION COMMISSION  
APR 29 1969  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Ralph Comstock Pipe Pulling Inc.  
Address Stafford, Kansas


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Homer J. Catt

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Homer J. Catt  
900 Sutton Place, Wichita, Kansas  
(Address)

Subscribed and sworn to before me this 28th day of April, 1969.  
My commission expires June 17, 1972

Dixie Lee Brown  
Notary Public.



*Log file*

*9*

DRILLING LOG

COMPANY: Jack Gaty  
CONTRACTOR: Pabco Drilling, Inc.

LOCATION: 200' W 200' S of  
Center of SW/4  
5-28S-2E *5-26-2E*  
Sedgwick Co Kansas

FARM NAME: No. 4 Broers

COMMENCED: 3-26-55 ✓  
COMPLETED: 4-2-55 ✓

CASING USED:

8-5/8" 97' cem w/75 sx  
5-1/2" 3004' cem w/35 sx.

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 24 1969  
CONSERVATION DIVISION  
Wichita, Kansas

FORMATION	FROM	TO	
Sand & Shale	0	35	
Shale & Shells	35	95	
Shale & Lime	95	370	
Lime & Shale	370	905	ST & SIM OK @ 550
Shale & Lime	905	1710	ST & SIM OK @ 1300
Lime	1710	1875	
Shale & Lime	1875	1945	
Shale & Broken Lime	1945	2155	ST & SIM OK @ 2115
Shale & Lime	2155	2544	
Lime	2544	2715	
Shale & Lime	2715	3004	
Total Depth	3004		

*Cable Tool Log:*

*3004-3009 - Burgess Sand  
35 B.O./day -*

STATE OF KANSAS )  
                          ) SS:  
SEDGWICK COUNTY )

I, D. J. Briggs, do hereby certify that the above is a true and correct copy of the log on the above captioned well, as shown on the daily drilling reports.

PABCO DRILLING, INC.  
By *D. J. Briggs*  
D. J. Briggs, President

Subscribed and sworn to before me this 4th day of April 1955

*Ruth M. Jenkins*  
Notary Public

My commission expires March 2, 1957

*Elev. per Laughlin Simmons 1446'*

*Measurements zeroed at R. B. and for 4 ft. above ground level*

*cc/ well log Bureau - 4-13-55  
cc " " - 3-14-57*