


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

NORTH

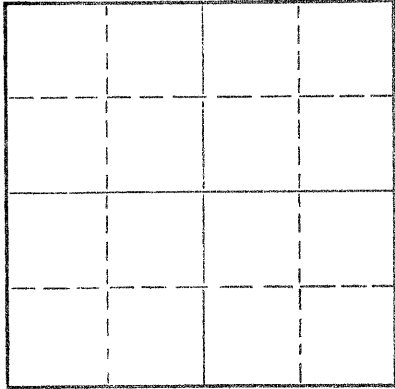

Locate well correctly on above  
Section Plat

Graham County, Sec. 36 Twp. 8 Rge. 22W (E) (W)  
Location as "NE/CNW/SW" or footage from lines. NE SE NW  
Lease Owner Three G Oil, Inc.  
Lease Name DeBoer Well No. 2  
Office Address 1101 Wichita Plaza, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 12-9 19 68  
Application for plugging filed 12-9 19 68  
Application for plugging approved 12-9 19 68  
Plugging commenced 12-9 19 68  
Plugging completed 12-9 19 68  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation Depth to top Bottom Total Depth of Well 3600 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	242'	-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

100 cubic feet cement @ 900'  
25 cubic feet cement @ 240'  
Plug and 10 cubic feet cement @ 40'  
Cementing by Sun Oilwell Cementing, Inc.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 10 1968  
CONSERVATION DIVISION  
Wichita, Kansas

12-10-1968

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor  
Address

STATE OF KANSAS COUNTY OF SEDGWICK, ss.  
Don Gardner

(employee of owner) or (contractor) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
300 Schweiter Building, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of December, 19 68

My commission expires December 14, 1969  
[Signature] Notary Public.

15-065-20186-00-00

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 12 1968  
CONSERVATION DIVISION  
Wichita, Kansas

DRILLERS LOG

#2 DeBOER  
NE SE NW Section 36-8S-22W  
Graham County, Kansas

OPERATOR: Three G Oil, Inc.  
1101 Wichita Plaza  
Wichita, Kansas

CONTRACTOR: Dunne-Gardner Petroleum, Inc.  
300 Schweiter Building  
Wichita, Kansas

COMMENCED: December 2, 1968

COMPLETED: December 9, 1968


CASING RECORD: 8-5/8" @ 242' w/175 sx

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	242	Surface clay
242	1015	Shale and shells
1015	1200	Sand and shells
1200	1405	Sand
1405	1659	Shale and shells
1659	1690	Anhydrite
1690	1895	Shale
1895	2210	Broken lime
2210	3258	Lime and shale
3258	3600	Lime
3600		Rotary Total Depth

STATE OF KANSAS )  
                          ) ss  
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log to the best of my knowledge and belief.

DUNNE-GARDNER PETROLEUM, INC.

  
Jack D. Dunne

Subscribed and sworn to before me this 11th day of December, 1968.

My commission expires:  
December 14, 1969

  
Notary Public