


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 Give All Information Completely
 Make Required Affidavit
 Mail or Deliver Report to:
 Conservation Division
 State Corporation Commission
 212 North Market, Insurance Bldg.
 Wichita, Kansas

15-065-02974-00-00

WELL PLUGGING RECORD

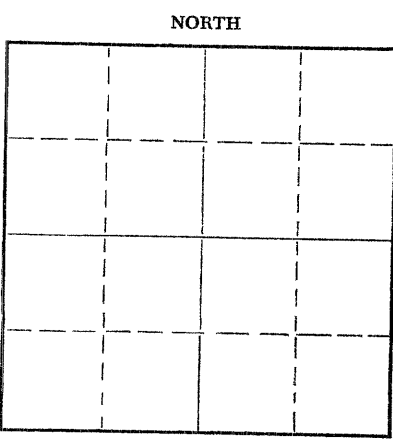

Locate well correctly on above Section Plat

Graham County. Sec. 16 Twp. 8S Rge. (E) 23 (W)
 Location as "NE/CNW/SW" or footage from lines SW SW NE
 Lease Owner Herndon Drilling Company
 Lease Name Keith "A" Well No. 1
 Office Address Drawer 489, Tulsa, Oklahoma
 Character of Well (completed as Oil, Gas or Dry Hole) Oil
 Date well completed 5-8-58
 Application for plugging filed 11-5 19 60
 Application for plugging approved 11-5- 19 60
 Plugging commenced 11-8 19 60
 Plugging completed 11-8 19 60
 Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius, Hill City
 Producing formation Kansas City Depth to top _____ Bottom _____ Total Depth of Well 3712 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5-1/2"	3712	2513.95

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Top perforation 3519-24. Hole was filled thru 5-1/2" casing w/1 yd. of sand to 3515' and 5 sx. cement mixed and dumped in pipe. Pipe was pulled and fluid level at 100'. Plug ahead of 10 sx. gel. and 50 sx. cement was pumped in hole 8-5/8' casing was full at completion of cementing.

RECEIVED
 STATE CORPORATION COMMISSION

DEC 2 1960

CONSERVATION DIVISION
 WICHITA, KANSAS

12/2/60

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor Barnes Well Cementing Company, Russell, Kansas
 Address Cemented w/Globe Cementing Company, Hill City, Kansas

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.
Tom Elliott (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Tom Elliott
Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 16th day of November, 1960

My commission expires June 19, 1961
Johnnie Alene Frese
 Johnnie Alene Frese Notary Public.



15-065-02974-00-00

WELL LOG

Well: Keith "A" #1
Location: SW SW NE Section 16-8S-23W
Graham County, Kansas
Owner: Herndon Drilling Company

Spudding date: 5/21/58
Date casing set: 5/21/58
Date rotary completed:
Date cable completed:

FROM	TO	FORMATION	REMARKS
0	229	Surface Hole	Run 7 Jts. 8-5/8" Csg. 233' less threads. Pipe set at 229'. Cemented w/175 sx. common cement, w/2% CC
229	925	Shale & Shells	
925	1569	Shale, Shells & Sand	
1569	2230	Shale & Shells	
2230	2415	Shale	
2415	3479	Shale & Lime	Ran 114 Jts. of new 14# J-55, 5 1/2" Csg. Total ran less threads, 3740.81 pipe set @ 3709'. Baffle Collar @ 1885'. Cemented w/175 sx. common cement & 100 bbls. of Kem- Pack.
3479	3710	Lime	
3710		Total Depth	

STATE DEPARTMENT OF REVENUE
DEC 2 1958
CONSERVATION DEPARTMENT
WICHITA
12/2/60

Subscribed and sworn to before me this 3rd
day of June, 19 58

I certify the above and foregoing to be a true and exact copy
of the original driller's log on the Keith "A" #1

Dusty M. Anderson
Notary Public
My commission expires: 7-1-59

HERNDON DRILLING COMPANY
C. J. Moore
By: _____
Title: Assistant Secretary