


15-065-20232-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

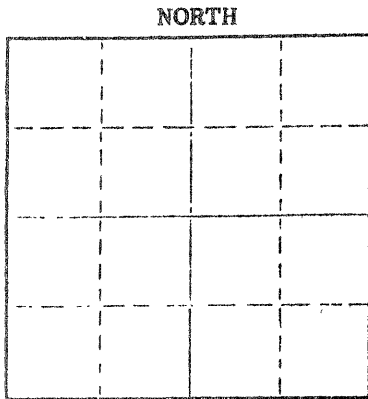

Locate well correctly on above Section Plat

Graham County, Sec. 34 Twp. 8 Rge. 23 (E) W (W)  
Location as "NE/CNW/SW" or footage from lines. NW NW NW  
Lease Owner Dreiling Oil, Inc.  
Lease Name D. Rush 'A' Well No. 1  
Office Address Rt. #1 - Box 28, Victoria, KS 67671  
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well  
Date well completed 6-8 1869  
Application for plugging filed 1-5 1976  
Application for plugging approved 1-6 1976  
Plugging commenced 2-2 1976  
Plugging completed 2-2 1976  
Reason for abandonment of well or producing formation Depleted  
If a producing well is abandoned, date of last production October 1975  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor, Palco, KS  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4,140 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8 5/8"	208'	0'
Casing				4 1/2"	4,139'	1,208'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged with 3 sacks Hulls, 70 sacks cement, 7 sacks Gel, 1 plug, 60 sacks cement.  
Maximum Pressure 200#, Shut in Pressure 50#.

RECEIVED  
STATE CORPORATION COMMISSION


Name of Plugging Contractor Dreiling Oil, Inc. (If additional description is necessary, use BACK of this sheet)  
Address Rt. #1 - Box 28, Victoria, KS 67671

FEB 4 1976  
CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS COUNTY OF ELLIS  
I, Joseph A. Hess, Sec. Treas. of Drlg. Cont. (Signature of contractor) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joseph A. Hess  
Joseph A. Hess, Hays, KS 67601  
(Address)

Subscribed and sworn to before me this 3rd day of February, 19 76



Cecilia Basgall  
Cecilia Basgall Notary Public.

# L. J. DREILING AND SONS, INC.

Victoria, Kansas 67671

## WELL LOG

15-005-20232-00-00

Company **Dreiling & Hiko Bell Mining & Oil Co.**  
 Route 2  
 Victoria, Kansas 67671

Farm **D. Rush "A" No. 1**

Total Depth **4140'**

Comm. **5-31-69** Comp. **6-8-69**

Contractor **L. J. Dreiling & Sons, Inc.**  
 Victoria, Kansas 67671

Sec. 34 Twp. 8 Rng. 23

Location **NW NW NW**

County **Graham**

Elevation: **2302'** K. B.  
**2299'** D. F.  
**2297'** G. R.

Casing Record  
 208' - 8 5/8"  
 4139' - 4 1/2"

Cement Record  
 150 sacks cement  
 10 bbls. salt flush &  
 175 sacks common salt  
 saturated cement

Production:

### Figures Indicate Bottom of Formations

0'	150'	Clay & Shale
150'	1500'	Shale
1500'	1565'	Sand
1565'	1960'	Shale & Sand
1960'	1997'	Anhy.
1997'	2589'	Shale with Lime Streaks
2589'	2785'	Shale & Lime
2785'	3029'	Lime, Sand & Shale
3029'	3415'	Shale & Lime
3415'	4140'	Lime
4140'	T.D.	

STATE OF KANSAS)  
 )ss  
 COUNTY OF ELLIS)

I, Leo F. Dreiling, of the L. J. Dreiling & Sons, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from your D. Rush "A" #1.

*Leo F. Dreiling*  
 LEO F. DREILING

Subscribed and sworn to before me this 12th day of June 1969.



*Joseph A. Hess*  
 JOSEPH A. HESS NOTARY PUBLIC

My commission expires: September 19, 1970

RECEIVED  
 STATE COMMISSIONER

JAN 6 1976

CONSERVATION DIVISION  
 Wichita, Kansas

1-6-76