

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-175-21249-00-00
Spot: W2NWSW Sec/Twnshp/Rge: 18-31S-34W
1980 feet from S Section Line, 510 feet from W Section Line
Lease Name: MLP ROONEY A Well #: 1
County: SEWARD Total Vertical Depth: 5850 feet

Operator License No.: 5003
Op Name: MCCOY PETROLEUM CORPORATION
Address: 8080 E CENTRAL STE 300
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
COND	20	40		
DVT		3129		350 SX
PROD	5.5	5849	900	570 SX
SURF	8.625	1749		675 SX

190.13

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 12/19/2007 8:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: AS PER KCC.

Plugging Proposal Received By: _____ Witness Type: NONE
Date/Time Plugging Completed: 12/21/2007 2:00 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:

PUMPED 200# HULLS & 50 SX CMT. DISPLACED WITH WATER TO 4900'. 1ST PLUG RAN TBG TO 1800' & PUMPED 25 SX CMT. 2ND PLUG RIPPED CASING AT 900' & PUMPED 10 SX GEL & 50 SX CMT. 3RD PLUG PULLED CASING TO 40' & PUMPED 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
5317	5321		

INVOICED
DATE 2-21-08
INV. NO. 2008061267

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY OIL WELL CEMENTING.

Plugged through: CSG

District: 01

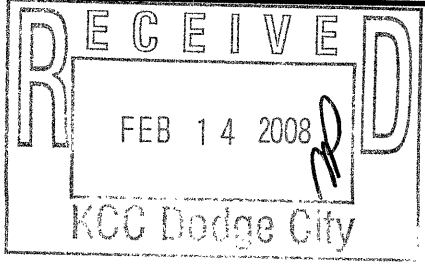

Signed Steve Durrant

(TECHNICIAN)
RECEIVED
KANSAS CORPORATION COMMISSION

FEB 19 2008

CONSERVATION DIVISION
WICHITA, KS

Form CP-2/3

PKT