

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-189-00565-00-00  
Spot: NWNWSE Sec/Twnshp/Rge: 23-34S-36W  
2640 feet from S Section Line, 2640 feet from W Section Line  
Lease Name: ERDWEIN Well #: 1  
County: STEVENS Total Vertical Depth: 2805 feet

Operator License No.: 5208  
Op Name: EXXONMOBIL OIL CORP  
Address: 14950 HEATHROW FORREST PKWY P  
HOUSTON, TX 77210

String	Size	Depth (ft)	Pulled (ft)	Comments
L1		2805		NOT CEMENTED
PROD 7		2652	0	WITH 800 SX CMT 91.16
SURF	10.75	730		WITH 250 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 01/31/2008 10:00 AM  
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.  
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGIN Phone: (580) 854-6515

Proposed Plugging Method: PUMP 40 SX CMT & 200# HULLS AT 2600'. PUMP 400# HULLS IN MUD AT 1200'. CIRCULATE HOLE WITH MUD AT 800'. 70 SX CMT AT 760'. 20 SX CMT AT 40'.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 02/01/2008 4:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

RAN TBG & TAGGED FILL UP AT 900'. WASHED OUT GLORIETTA SAND TO 1180' & LOST CIRCULATION. TBG STACKED OUT. SPOT 200# HULLS & 40 SX CMT AT 1160'. REGAINED CIRCULATION. PLUG AT 750' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
2648	2805		


INVOICED  
DATE 2-19-08  
INV. NO. 2008061237

RECEIVED  
KANSAS CORPORATION COMMISSION  
FEB 13 2008  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: TBG

District: 01

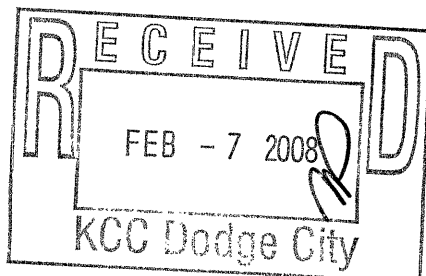

Signed

*Ken Jehlik*  
(TECHNICIAN)

*[Signature]*  
Form CT-2/3