

15-065-02430-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Graham County, Sec. 21 Twp. 8 S Rge. 23(W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C-NE NE SW

Lease Owner Sunray Oil Corporation

Lease Name McCoy Well No. 1

Office Address Box 195, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 1-8 19 52

Application for plugging filed 2-21 19 52

Application for plugging approved 2-23 19 52


Plugging commenced 3-28 19 52

Plugging completed 4-6 19 52

Reason for abandonment of well or producing formation Lsg-KC does not contain a commercial quantity of oil in this well.

If a producing well is abandoned, date of last production 2-21 19 52

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

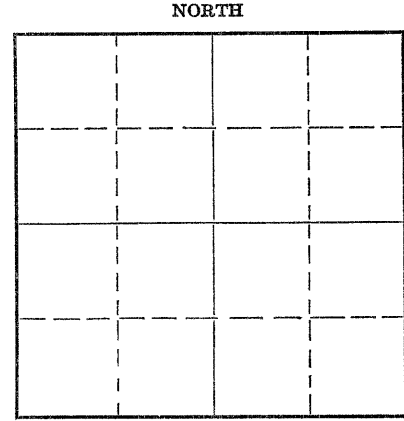

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Lsg-KC Depth to top 3554 Bottom 3767 Total Depth of Well 3795 Feet PB 3769'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lsg-KC	Oil	3554	3767	5 1/2"	3794'	3395'
				8-5/8"	329'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged back with sand from 3769' to 3580'. Dumped 5 sax cement on top of sand. Pulled pipe. Mudded hole to 320'. Dumped 15 sax cement. Mudded hole to 35'. Set 5' rock bridge w/10 sax cement on top to complete plugging.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Sunray Oil Corporation  
Address Box 195, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.  
W. E. Westbrook, Jr. (employee of owner) or former proprietor of the above-described well,


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. E. Westbrook, Jr. Jr. Engr.

Box 195, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 22nd day of April, 19 52

My commission expires 4-19-56 Notary Public.



4-23-52

15-065-02430-00-00

Tulsa, Oklahoma  
December 26, 1951

Sunray Oil Corporation  
Tulsa, Oklahoma

Stickle Drilling Company: Contractor

Drilling commenced: December 7, 1951  
Drilling completed: December 23, 1951

Frank A. McCoy #1  
NE-NE-SW-Section 21-88-23W,  
Graham Co., Kansas.

DRILLERS LOG

Surface Clay	0-40
Shale	40-80
Sand	80-150
Shale	150-870
Red Bed	870-940
Sand	940-1000
Shale & Shells	1000-1220
Red Bed	1220-1440
Sand & Shells	1440-1550
Shale	1550-1650
Shale & Shells	1650-1770
Red Bed	1770-1910
Anhydrite	1910-1950
Shale & Shells	1950-2425
Broken Lime & Shale	2425-2510
Lime & Shale	2510-2745
Shale & Shells	2745-2830
Shale & Lime	2830-2925
Shale	2925-2990
Shale & Lime	2990-3375
Lime	3375-3590
Lime & Chert	3590-3610
Shale & Lime	3610-3654
Lime	3654-3772
Lime & Shale	3772-3795 TD with rotary

I, Frank E. Stickle, certify the above to be a true and complete drillers log of Sunray Oil Corporation's Frank A. McCoy #1 NE-NE-SW-Section 21-88-23W, Graham County, Kansas.

Frank E. Stickle  
Frank E. Stickle

Lillian T. Bonham  
Notary Public

February 13, 1952  
My commission expires

**PLUGGING**  
FILE SEC 21 T 8 R 23W  
BOOK PAGE 146 LINE 20

4-23-52