

15-065-20819-0000


FORM CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Graham County, Sec. 23 Twp. 8S Rge. XXX 23 (W)  
SE NW NE

Location as "NE/CNW/SW" or footage from lines \_\_\_\_\_  
Lease Owner John P. Jennings  
Lease Name LAGERE Well No. 3  
Office Address Suite 309, 200 E. First St., Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed May 24 1976  
Application for plugging filed (verbally) May 24 1976  
Application for plugging approved (verbally) May 24 1976  
Plugging commenced May 24 1976  
Plugging completed May 24 1976  
Reason for abandonment of well or producing formation No commercial quantity of gas or oil encountered.  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

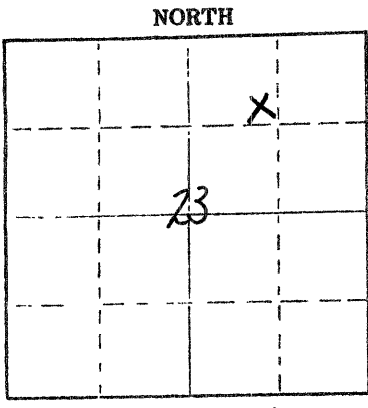

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3574'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	207 K.B.	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st Plug was Set @ 750' with 70 sx. cement  
2nd Plug was Set @ 200' with 20 sx. cement  
3rd Plug was Set @ 40' with 10 sx. cement  
50/50 Posmix, 6% gel

Plug was down @ 10:30 p.m. May 24, 1976  
STATE PLUGGER: Gilbert Balthazor

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.  
Address 801 Union Center, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK ss.  
Jerry A. Langrehr, Exec. V. P. (employee of owner) or (owner or operator) of the above-described



well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jerry A. Langrehr  
801 Union Center, Wichita, Kansas 67202  
(Address)

Subscribed and sworn to before me this 1st day of June, 1976

My commission expires February 18, 1980

Diane Steincamp  
Diane Steincamp Notary Public.



15-065-20819-00-00

CONTRACTOR'S WELL LOG

OPERATOR:	John P. Jennings
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	LAGERE #3
LOCATION:	SE NW NE Section 23-8S-23W Graham County, Kansas
SPUD DATE:	May 19, 1976
COMPLETION DATE:	May 24, 1976

0	30	Sand
30	50	Post Rock
50	228	Sand & Shale
228	1263	Shale
1263	1763	Shale & Sand
1763	1794	Anhydrite
1794	2905	Shale
2905	3084	Lime & Shale
3084	3396	Shale & Lime
3396	3574	Lime
	3574	Rotary Total Depth

Drilled 208' of 12 1/4" hole. Ran jts, 8 5/8" casing, tallied 200', Set @ 207' K.B. with 50/50 Posmix, 2% gel, 3% ca. cl. Plug was down @ 12:00 mid-night May 19, 1976.

PLUGGED AND ABANDONED: 1st Plug was Set @ 750' with 70 sx. cement. 2nd Plug was Set @ 200' with 20 sx. cement. 3rd Plug was Set @ 40' with 10 sx. cement. 50/50 Posmix, 6% gel. State Plugger: Gilbert Balthazor - Plug was down @ 10:30 p.m. May 24, 1976.

SAMPLE TOPS:

Anhydrite	1764'
B/Anhydrite	1794'

STATE OF KANSAS            )  
                                   )    SS  
 COUNTY OF SEDGWICK    )

Jerry A. Langrehr, Executive Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the LAGERE #3, SE NW NE, Section 23-8S-23W, Graham County, Kansas.



ABERCROMBIE DRILLING, INC.

By *Jerry A. Langrehr*  
 Jerry A. Langrehr, Exec. V. P.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 1st day of June, 1976.

*Diane Steincamp*  
 Diane Steincamp, Notary Public

My Commission Expires: February 18, 1980.



6/3/76