

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

GRAHAM County. Sec. 7 Twp. 8S Rge. 22W (E) (W)

Location as "NE/CNW/SW" or footage from lines C SE NE

Lease Owner K & E AND BOA

Lease Name STUHLIK Well No. 2

Office Address 719 Union Center, Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 8-22-58 19

Application for plugging filed 8-22-58 19

Application for plugging approved 8-22-58 19


Plugging commenced 8-22-58 19

Plugging completed 8-22-58 19

Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

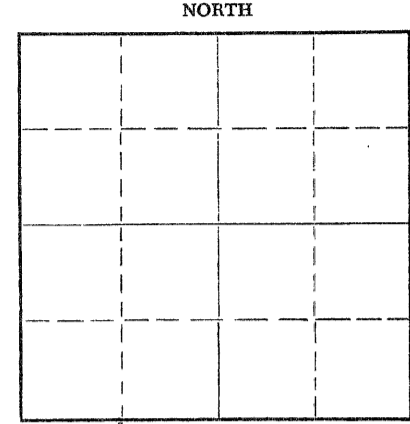

Locate well correctly on above Section Flat

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3625 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	221	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plug hole with heavy mud to 600' set plug with 25 sx cement. Fill with heavy mud to 220' set plug with 15 sx cement. Fill with heavy mud to 40' set solid bridge with 10 sx cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor K & E DRILLING, INC.

Address 719 Union Center, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

CLINTON ENGSTRAND (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath; says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Clinton Engstrand  
CLINTON ENGSTRAND, K & E DRILLING, INC.  
719 Union Center, Wichita 2, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of August, 19 58.

My commission expires August 11th, 1962

Patricia M. Edwards, Notary Public.

PLUGGING  
FILE SEC 7 T 0 R 2W  
BOOK PAGE 125 L 12

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 30 1958  
AUG 30 1958  
CONSERVATION DIVISION

DRILLER'S LOG

OPERATOR	K & E AND BOA 719 Union Center Wichita 2, Kansas	FARM NAME:	#2 STUCHLIK
CONTRACTOR:	K & E DRILLING, INC. 719 Union Center Wichita 2, Kansas	LOCATION:	6 SE NE, 7-88-22W Graham Co, Kansas
CASING:	8-5/8" @ 221' (150 sx)	COMMENCED:	8-15-58
R.T.D.	3625'	COMPLETED:	8-22-58
		ELEVATION:	2158' KB
		PRODUCTION:	D & A

## FORMATION RECORD

Depths shown indicate bottom of formations

Cellar	8
Clay & Soil	35
Sand	150
Shale	160
Shale	220
Shale & Shells	1300
Sand	1550
Red Bed & Shale	1580
Shale	1800
Anhydrite	1840
Shale	1910
Shale & Shells	2225
Shale & Lime	2490
Lime & Shale	3080
Shale & Lime	3310
Lime & Shale	3395
Lime	3625
R.T.D.	3625

## CERTIFICATION

STATE OF KANSAS

COUNTY OF SEDGWICK


I, Clinton Engstrand, President of K & E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the Driller's Log of the K & E and BOA #2 STUCHLIK well.

  
 Clinton Engstrand

Subscribed and sworn to before me this 29th day of August 1958.

  
 Patricia M. Edwards, Notary Public

My commission expires: August 11th, 1962.


**RECEIVED**  
 STATE CORPORATION COMMISSION

 AUG 30 1958  
 AUG 30 1958  
 CONSERVATION DIVISION  
 Wichita, Kansas