

15-065-00120-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

Graham County, Sec. 13 Twp. 8S Rge. (E) 22 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. NE-NE-NE

Lease Owner Helmerich & Payne, Inc.

Lease Name Luck Well No. 1

Office Address 415 Philtower, Tulsa 3, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 2-23 19 45

Application for plugging filed 12-31 19 46

Application for plugging approved 1-7 19 47

Plugging commenced 1-19 19 47

Plugging completed 1-20 19 47

Reason for abandonment of well or producing formation Production Depleted

If a producing well is abandoned, date of last production 12-9 19 46

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Kerr

Producing formation Lansing Depth to top 3414' Bottom 3438' Total Depth of Well 3612 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Kansas City	Oil	3254'		10-3/4"	158'	None
Arbuckle	Water	3569'		5-1/2"	3,569'	2,400'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mudded hole to 150' and dump 15 sacks of cement. Mudded hole to 15' and dumped 10 sacks of cement to surface.

13 8 22 W
91 13

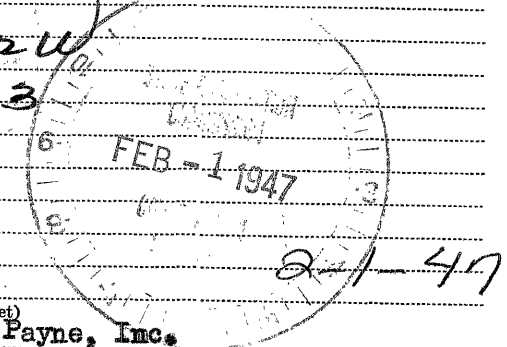

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Helmerich & Payne, Inc.
Address 415 Philtower Building
Tulsa 3, Oklahoma

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
Charles F. King (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles F. King
415 Philtower, Tulsa 3, Oklahoma (Address)

SUBSCRIBED AND SWORN to before me this 31st day of January 19 47

My commission expires 7-22-47
Notary Public

John Luck #1
NE/4 NE/4 NE/4 Section 15-23-22W
Graham County, Kansas
Helmerich & Payne, Inc. and J. R. Dunaway

Commenced: November 23, 1944
 Completed: February 16, 1945


Sand	0	70
Sand and shale	70	200
Shale	200	380
Shale and shells	380	500
Dakota Sand	500	647
Shale	647	650
Shale and shells	650	805
Sand and shale	805	900
Shale and shells	900	1035
Red bed	1035	1150
Sand, shale	1150	1330
Shale and shells	1330	1435
Shale	1435	1575
Anhydrite	1575	1615
Shale and shells	1615	2265
Lime and shale	2265	2556
Lime	2556	2610
Lime and shale	2610	2807
Soft sandy shale	2807	2847
Shale and lime	2847	2915
Lime	2915	2952
Lime and shale, sandy	2952	3025
Lime	3025	3093
Cherty lime	3093	3105
Shale and lime	3105	3234
Lime	3234	3289
Soft lime	3289	3297
Lime	3297	3308
Cherty conglomerate	3308	3365
Lime	3365	3416
Soft, porous lime	3416	3422
Lime	3422	3480
Lime and shale	3480	3502
Shale	3502	3528
Shale and lime	3528	3571
Top Arbuckle	3571	3578
Lime	3578	3612
TOTAL DEPTH	3612	

CASING RECORD

10 3/4" Casing set at 158' and cemented with 125 sacks of cement.

5 1/2" Casing set at 3569' and cemented with 150 sacks of cement.

STATE OF OKLAHOMA)
) ss
 COUNTY OF TULSA)



I hereby affirm that the above and foregoing is a true and correct copy of the log of the John Luck #1 well, located in the Northeast Quarter of the Northeast Quarter of the Northeast Quarter of Section 15, Township 3 South, Range 22 West, Graham County, Kansas.

HELMERICH & PAYNE, INC.

By William Broadhurst
 Treasurer

Subscribed and sworn to before me, a Notary Public, this 2nd day of January, 1947.

W. H. Steffen
 Notary Public

commission expires July 22, 1947

John Luck #1
NE/4 NE/4 NE/4 Section 13-66-22W
Graham County, Kansas
Belmerich & Payne, Inc. and J. E. Dunaway

Commenced: November 23, 1944
 Completed: February 16, 1945

Sand	0	70 :
Sand and shale	70	200
Shale	200	350
Shale and shells	350	500
Dakota Sand	500	647
Shale	647	850
Shale and shells	850	905
Sand and shale	905	900
Shale and shells	900	1035
Red bed	1035	1150
Sand, shale	1150	1330
Shale and shells	1330	1435
Shale	1435	1375
Anhydrite	1375	1615
Shale and shells	1615	2265
Line and shale	2265	2554
Line	2554	2610
Line and shale	2610	2807
Soft sandy shale	2807	2847
Shale and line	2847	2915
Line	2915	2952
Line and shale, sandy	2952	3025
Line	3025	3095
Cherty line	3095	3105
Shale and line	3105	3234
Line	3234	3259
Soft line	3259	3297
Line	3297	3306
Cherty conglomerate	3306	3365
Line	3365	3415
Soft, porous line	3415	3422
Line	3422	3450
Line and shale	3450	3502
Shale	3502	3525
Shale and line	3525	3571
Top Arbuckle	3571	3578
Line	3578	3612
TOTAL DEPTH	3612	

CASING RECORD

1-3-47

10 3/4" Casing set at 150' and cemented with 125 sacks of cement.

5 1/2" Casing set at 3565' and cemented with 150 sacks of cement.

STATE OF OKLAHOMA)
)
 COUNTY OF YULSA)

I hereby affirm that the above and foregoing is a true and correct copy of the log of the John Luck #1 well, located in the Northeast Quarter of the Northeast Quarter of the Northeast Quarter of Section 13, Township 6 South, Range 22 West, Graham County, Kansas.

BELMERICH & PAYNE, INC.

13 8 22W
 91 13

William Crossland
 Treasurer

Subscribed and sworn to before me, a Notary Public, this 2nd day of January, 1947.

W. E. Huffman
 Notary Public

My commission expires July 28, 1947