


15-069-20854-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Graham County, Sec. 15 Twp. 8S Rge. 22 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
SW NE SE
Lease Owner The Maurice L. Brown Co.
Lease Name RADCLIFFE "A" Well No. 1
Office Address 1500 Vickers KSB& T Bldg, Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole
Date Well completed September 3 1976
Application for plugging filed (verbally) September 3 1976
Application for plugging approved (verbally) Sept. 3 1976
Plugging commenced September 3 1976
Plugging completed September 3 1976
Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered
If a producing well is abandoned, date of last production
19

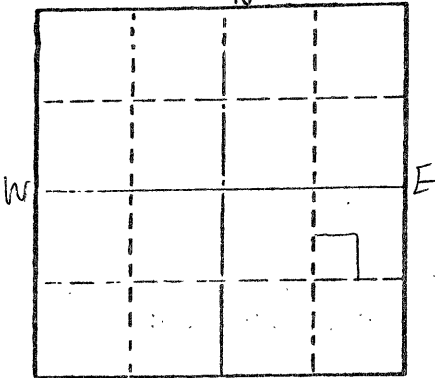

Locate well correctly on above
Section Plot

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	253' K.B.	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

1st plug set at 850' with 70 sx.
2nd plug set at 250' with 20 sx.
3rd plug set at 40' with 10 sx.

RECEIVED
STATE CORPORATION COMMISSION

SEP 13 1976

Plug was down at 5:30 p.m. 9-03-76
State Plugger - Gilbert Balthazor, Palco, Kansas

CONSERVATION DIVISION
Wichita, Kansas

9-13-76

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____

STATE OF Kansas COUNTY OF Sedgwick ss.
Jack L. Partridge, Asst. Sec. Treas.

(employee of owner) or (owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Jack L. Partridge*

801 Union Center, Wichita, Ks. 67202


(Address)

10th day of September 1976

Sandra Richman
Sandra Richman

Notary Public.

July 21, 1979.



15-065-20854-00-00

CONTRACTOR'S WELL LOG

OPERATOR: The Maurice L. Brown Co.
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: RADCLIFFE "A" #1
 LOCATION: SW NE SE, Sec. 15-8S-22W
 Graham County, Kansas
 SPUD DATE: August 26, 1976
 COMPLETION DATE: September 3, 1976

0	210	Clay & Sand
210	253	Shale
253	1170	Shale & Sand Streaks
1170	1230	Shale
1230	1450	Sand
1450	1705	Shale
1705	1739	Anhydrite
1739	2230	Shale
2230	2480	Lime & Shale
2480	3025	Shale & Lime
3025	3100	Lime & Shale
3100	3315	Lime
3315	3350	Lime & Shale
3350	3418	Lime
3418	3443	Lime & Shale
3443	3580	Lime
	3580	Rotary Total Depth

Spud at 3:15 p.m. 8-26-76. Drilled 253' of 12 1/4" hole. Ran 6 jts. of 8 5/8" casing, tallied 243.51. Set at 253' K.B. Cemented with 190 sx. of Class "A" Cement, 3% Ca.Cl. Cement circulated. Plug was down at 7:15 p.m. 8-26-76. Ran 2 8 5/8" centralizers at 7:30 8-27-76 - drilling cement.

D & A. T.D. 3580', logging. Set first plug at 850' with 70 sx., 2nd plug at 250' with 20 sx., 3rd plug at 40' with 10 sx. Plug was down at 5:30 p.m. 9-03-76. State plugger - Gilbert Balthazor, Palco, Kansas.

SAMPLE TOPS:

Anhydrite 1705'
 B/Anhydrite 1739'

SEP 13 1976
 9-13-76

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)


Jack L. Partridge, Assistant Secretary Treasurer of Abercrombie Drilling, Inc. does hereby state that the above and foregoing is a true and correct copy fo the log of the RADCLIFFE "A" #1, SW NE SE, Section 15-8S-22W, Graham County, Kansas.

ABERCROMBIE DRILLING, INC.

BY: Jack L. Partridge
 Jack L. Partridge, Asst. Sec. Treas.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 10th day of September, 1976.

Sandra Richman
 Sandra Richman, Notary Public



My Commission Expires: July 21, 1979.