


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

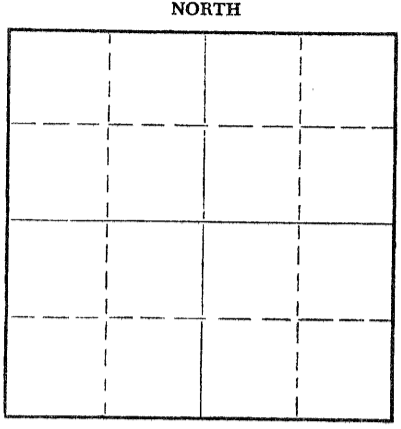

Locate well correctly on above Section Plat

Sedgwick County. Sec. 11 Twp. 27 Rge. 2E (E) (W)
Location as "NE/CNW/SW" or footage from lines NE NW NW
Lease Owner Wayne Temple
Lease Name Reed Well No. # 2
Office Address Burden Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 8-31-61 19__
Application for plugging filed 10-28-70 1970
Application for plugging approved 11-1-70 1970
Plugging commenced 11-9-70 1970
Plugging completed 11-10-70 19__
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production unknown 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Ted E. Dewey
Producing formation Simpson Depth to top 3310 Bottom 3415 Total Depth of Well 3415 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|------|-------|--------|------------|
| Simpson | Oil | 3415 | 3415 | 5 1/2 | 3350 | 300' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Haliburton plug @ 3320 and 1/2 yard of sand, dumped five sacks of cement, mud to 300' bridged @ 300' with 15 feet of rock and cement to surface.


RECEIVED
STATE CORPORATION COMMISSION
11-24-70
NOV 24 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Joe's Well Service
Address Box 623

STATE OF Kansas, COUNTY OF Cowley, ss.
Joseph Yount (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joe Yount
Box 623, Winfield, Kansas 67156
(Address)



SWORN TO before me this 23rd day of November, 1970
May E. Bennett Notary Public.



R

GEOLOGICAL REPORT

N. H. Blair Oil Company
No. 2 Road
NE 1/4 Sec. 11,
Township 27 South, Range 2 East
Sedgwick County, Kansas

Contractors:

Red Williams Company

Elevations:

3360 Brown
 3271 Brown
 3111 Kelly

Surface Casings:

10' 2" 2 1/2" x 2 1/2" x 10' 2" x 10' 2"

Under Surfaces:

5' 2" 2 1/2" x 2 1/2" x 5' 2" x 5' 2"

Completion Date:

4-1-56

Bit Size:

7 7/8" 2 1/2" x 2 1/2" x 7 7/8" x 7 7/8"

Total Depth:

3310'

Formation Table

datum is calculated from Kelly finishing Elevation

| Formation | Depth |
|--------------------|-------------|
| Lansing | 2060 |
| Kansas City | 2456 |
| Mississippi | 2597 |
| Kinderhook | 3111 |
| Viola | 3191 |
| U. Simpson sh. | 3215 |
| L. Simpson sh. | 3263 |
| Arbuckle dol. | 3306 |
| Total Depth | 3310 |

STATE GEOLOGICAL SURVEY
 NOV 24 1970
 CONSERVATION DIVISION
 Wichita, Kansas