

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Graham County. Sec. 19 Twp. 8 Rge 22 (E) (W) x

Location as "NE/CNW/SW" or footage from lines SE SE NE  
Lease Owner Woodman & Tannitti Drilling Co.  
Lease Name Quint Well No. 1  
Office Address 714 Union National Bldg Wichita, Kans.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed 6-25-58 1958  
Application for plugging filed " 19  
Application for plugging approved " 19  
Plugging commenced " 19  
Plugging completed " 19  
Reason for abandonment of well or producing formation Dry

NORTH

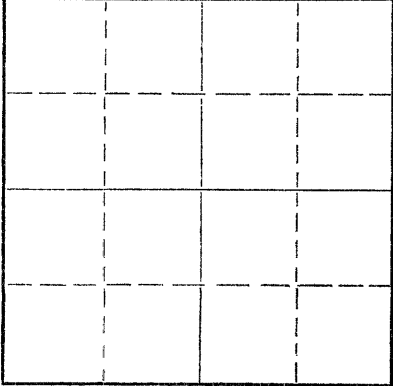

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? \_\_\_\_\_

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3655 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<del>Gas</del>				8 5/8"	174'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Bottom Plug 600' 25 Sacks of cement.  
Middle Plug 170' 15 Sacks of cement.  
Top Plug 40' 1/3 sack hulls 10 sacks of cement.

JUL 15 1958

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor \_\_\_\_\_  
Address \_\_\_\_\_

STATE OF KANSAS COUNTY OF SEDGWICK, ss.  
K. T. Woodman (employee of owner) or (owner or operator)

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) K. T. Woodman

714 Union National Bldg., Wichita 2, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this \_\_\_\_\_ day of \_\_\_\_\_, 1958

My commission expires March 15, 1961

Mildred E. Lick  
Mildred E. Lick, Notary Public.



DRILLING LOG

Company: Woodman & Iannitti and E. J. Carter  
 Lease: #1 Quint SE SE NE 19-8-22W  
 Graham County, Kansas  
 Contractor: Woodman & Iannitti Drilling Company  
 P. O. Box 387, Hoisington, Kansas  
 Date Commenced: 6-17-58  
 Date Completed: 6-25-58  
 Total Depth: 3655  
 Casing: 8-5/8" Cemented at 174' with 125  
 sacks cement

Figures Indicate the Bottom of Formation

0-60 Clay Post Rock  
 174 Shale  
 860 Shale  
 1190 Sand-Shale  
 1320 Shale-Sand  
 1555 Sand  
 1795 Red-Bed-Shale  
 1805 Anhydrite  
 1815 Anhydrite  
 2095 Shale-Shells  
 2275 Shale-Shells  
 2375 Shale-Shells  
 2425 Lime-Shale  
 2560 Lime-Shale  
 2725 Lime-Shale  
 3460 Lime  
 3508 Lime-Chert  
 3655 Lime-T. D.

JUL 15 1958  
 HOISINGTON, KANSAS  
 REGISTRATION DIV.

GEOLOGICAL TOPS

Elevation	2168 RB
Anhydrite	1795 / 373
Heebner	3390 -1222
Toronto	3411 -1243
Lansing	3425 -1257
Base/Kansas City	3641 -1473
Total Depth	3655 -1487

I certify the above to be a true and correct copy of the Driller's Log and Geological Tops to the best of my knowledge and belief.

WOODMAN & IANNITTI DRILLING CO.  
 By: K. T. Woodman  
 K. T. Woodman

DRILLING LOG  
 SEC 19 8 22W  
 PAGE 111 LINE 29