

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-23254-00-00
Spot: NWSESWNE Sec/Twnshp/Rge: 34-33S-10W
3225 feet from S Section Line, 1705 feet from E Section Line
Lease Name: SPICER "B" Well #: 1
County: BARBER Total Vertical Depth: 5228 feet

Operator License No.: 31191
Op Name: R & B OIL & GAS, INC.
Address: 904 N LOGAN PO BOX 195
ATTICA, KS 67009

String Size Depth (ft) Pulled (ft) Comments
SURF 8.625 266

169.91

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 02/21/2008 1:30 AM
Plug Co. License No.: 5929 Plug Co. Name: DUKE DRILLING CO., INC.
Proposal Rcvd. from: JOHN ARMBRUSTER Company: DUKE DRILLING CO., INC. Phone: (316) 267-1331

Proposed Plugging Method: 1ST PLUG AT 5160' WITH 50 SX CMT. 2ND PLUG AT 600' WITH 50 SX CMT. 3RD PLUG AT 290' WITH 50 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/21/2008 2:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

1ST PLUG AT 5060' WITH 75 SX CLASS A CMT W/2% CC. PULLED 10 STANDS WAIT ON CMT TO SET. RUN BACK & TAGGED TOP OF CMT AT 4880'. 2ND PLUG AT 600' WITH 50 SX CMT. 3RD PLUG AT 290' WITH 50 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.


Perfs:

INVOICED
DATE 3-5-08
INV. NO. 2008061323

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: DP

District: 01

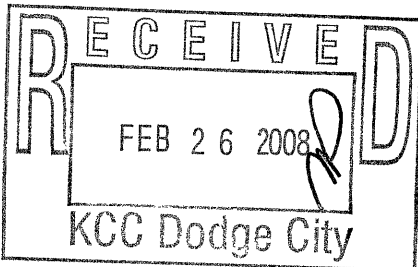

Signed

Stephen J. Pfeifer
(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION

Form CP-2/3

MAR 03 2008

CONSERVATION DIVISION
WICHITA, KS

[Handwritten initials]