

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-20920-00-00
Spot: NESWNE Sec/Twnshp/Rge: 36-32S-19W
1550 feet from N Section Line, 1550 feet from E Section Line
Lease Name: REYNOLDS Well #: 36-7
County: COMANCHE Total Vertical Depth: 6250 feet

Operator License No.: 3882
Op Name: SAMUEL GARY JR. & ASSOCIATES, IN
Address: 1560 BROADWAY STE 2100
DENVER, CO 80202

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		5050		WITH 2 SX CMT
PROD	5.5	6250	1988	WITH 388 SX CMT
SURF	8.625	663		WITH 325 SX CMT

203.13

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 02/25/2008 3:35 PM
Plug Co. License No.: 30891 Plug Co. Name: LEIKER WELL SERVICE, INC.
Proposal Rcvd. from: KEVIN WILSON Company: SAMUEL GARY JR. & ASSOC. Phone: (620) 617-6880

Proposed Plugging Method: CIBP @ 5050' WITH 2 SX CMT. PLUG AT STUB WITH 50 SX CMT. PLUG AT 1060' WITH 15 SX GEL & 50 SX CMT. PLUG AT 690' WITH 50 SX CMT. PLUG AT 300' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/26/2008 10:35 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

SET CIBP @ 5050' WITH 2 SX CMT. 1ST PLUG AT 1988' WITH 50 SX CMT. 2/26/08:
2ND PLUG AT 1060' WITH 15 SX GEL & 50 SX CMT. 3RD PLUG AT 690' WITH 50 SX
CMT. 4TH PLUG AT 300' WITH 40 SX CMT. 5TH PLUG AT 40' WITH 20 SX CMT.
GOOD RETURNS. CMT CIRCULATED.

Perfs:


Top	Bot	Thru	Comments
6103	6106		
5824	5837		
5295	5301		
5259	5263		
5106	5108		
5095	5104		
4837	4840		
4729	4734		

INVOICED
DATE 3-5-08
INV. NO. 2008061325

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: CSG

District: 01

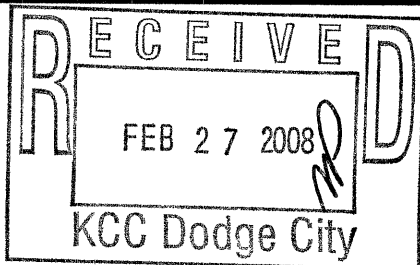

Signed Eric MacLaren

(TECHNICIAN)
RECEIVED
KANSAS CORPORATION COMMISSION

MAR 03 2008

CONSERVATION DIVISION
WICHITA, KS

Form CP-2

[Handwritten initials]