

15-163-00082-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Rooks

County. Sec. 18 Twp. 10 Rge. (E) 18 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. ~~SE $\frac{1}{4}$~~ ~~SE $\frac{1}{4}$~~ NW $\frac{1}{4}$

Lease Owner. The Phil-Han Oil Company

Lease Name. Vohs Well No. 1

Office Address. 1212 Union Nat'l. Bk. Bldg., Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed. Nov. 30, 1944 19

Application for plugging filed. December 1, 1944 19

Application for plugging approved. " 19


Plugging commenced. " 19

Plugging completed. " 19

Reason for abandonment of well or producing formation. Dry Hole

If a producing well is abandoned, date of last production. 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

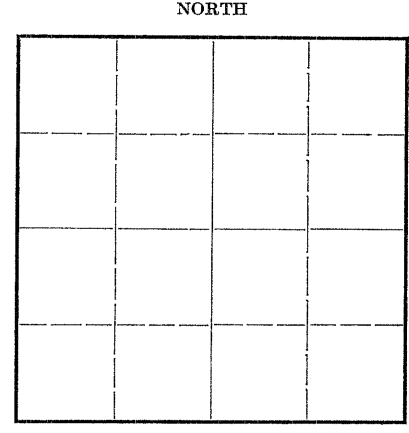

Name of Conservation Agent who supervised plugging of this well. H. W. Kerr

Producing formation. Depth to top. Bottom. Total Depth of Well. 3760 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	852' 9"	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud from 3760' to bottom of surface pipe. Set bridge at 845' and cemented with 20 sacks. Filled hole with mud to 20', set bridge and cemented with 10 sacks.

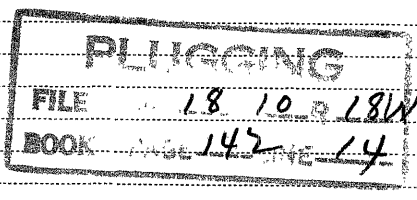

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. The Phil-Han Oil Company
Address. 1212 Union National Bank Bldg., Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
L. E. Phillips, Jr. (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Handwritten Signature]
1212 Union Nat'l. Bk. Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 12th day of December 1944

My commission expires Oct. 4, 1945

[Handwritten Signature]
Notary Public.

20-1800-s 11-43-10M

Rec'd 12-13-1944

15-163-00082-00-00

#1 VOHS
The Phil-Han Oil Co.
Comm: 11-13-44
Comp: 11-30-44

SE SE NW Sec. 18-10-18W
Rooks County, Kansas
Elevation - 2132'
Production - D & A

shale 200
shale & shells 375
shale & sand 800
shale & lime 860

