


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Rooks County. Sec. 34 Twp. 10S Rge. 18 (NE) W (W)
Location as "NE/CNW/SW" or footage from lines SE NE NE
Lease Owner Davis Bros.-Transit Corporation
Lease Name Wilson "C" Well No. 1
Office Address 1516 Liberty Bank Building, Oklahoma City, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed January 3, 19 59
Application for plugging filed January 3, 19 59
Application for plugging approved January 3, 19 59
Plugging commenced January 3, 19 59
Plugging completed January 3, 19 59
Reason for abandonment of well or producing formation No production

NORTH

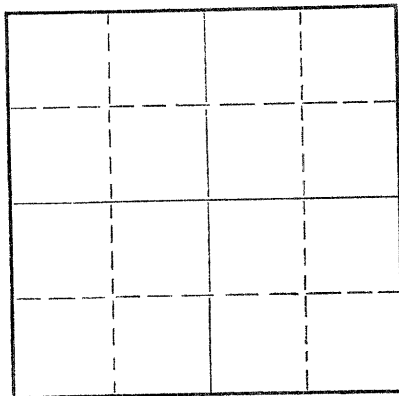

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert P. Leiker, 805 Main St., Victoria, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3733 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	160'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy drilling mud to 600'; set plug, cemented with 20 sacks cement
Filled hole with heavy drilling mud to 155'; set plug, cemented with 15 sacks cement
Filled hole with heavy drilling mud to 40'; set plug, cemented with 10 sacks cement to
bottom of cellar

RECEIVED
STATE CORPORATION COMMISSION
FEB 11 1959
02-11-1959
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Transit Corporation
Address 1516 Liberty Bank Building, Oklahoma City, Oklahoma

STATE OF Oklahoma, COUNTY OF Oklahoma, ss.
Paul E. Gathers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Paul E. Gathers

(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of February, 19 59

Mildred Grom
Notary Public.

My commission expires May 17, 1962

PLUGGING
FILE SEC. 34 T. 10 R. 18W
BOOK PAGE 10 LINE 16

15-163-00911-00-00

DRILLER'S WELL LOG

Davis Bros.-Transit Corporation - Wilson "C" # 1 well located in
SE NE NE Section 34-10S-18W,
Rooks County, Kansas

Commenced: December 21, 1958
Completed: January 3, 1959
Elevation: 2057' KB

Casing 8 5/8" @ 160'
Cemented w/130 sacks

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Summary of Formation</u>	
Clay, sand and rock	0	40		
Rock	40	70		
Sand	70	105	Anhydrite	1413'
Shale	105	160	Topeka	3056'
Blue shale	160	345	Heebner	3276'
Shale and sand	345	1160	Toronto	3293'
Shale and shells	1160	1413	Lansing	3320'
Anhydrite	1413	1443	Base of K.C.	3557'
Shale	1443	1650	Conglomerate	3591'
Shale and shells	1650	2000	Simpson	3663'
Lime	2000	2113	Arbuckle	3703'
Lime and shale	2113	2254		
Lime	2254	2360		
Lime w/shale streaks	2360	2495		
Lime and shale	2495	2680		
Shale w/lime streaks	2680	3065		
Shale and lime	3065	3118		
Lime and shale	3118	3232		
Lime	3232	3278		
Lime and shale	3278	3305		
Lime	3305	3562		
Lime and shale	3562	3570		
Lime and chert	3570	3674		
Lime	3674	3733 TD		

I hereby certify the foregoing to be a true and accurate Driller's Log of the formation encountered in the above well.

Subscribed and sworn to before me
this 9th. day of February, 1959.

TRANSIT CORPORATION

BY Paul E. Gardner

My Commission expires May 17, 1962.

Mildred Jean
Notary Public

PLUGGING
FILE SEC. 34 T. 10 R. 18W
BOOK PAGE 10 LINE 16