

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-135-22224-00-01  
Spot: NWSWNWNE Sec/Twnshp/Rge: 5-17S-25W  
4604 feet from S Section Line, 2427 feet from E Section Line  
Lease Name: STUTZ Well #: 4-5  
County: NESS Total Vertical Depth: 4510 feet

Operator License No.: 31142  
Op Name: PETROLEUM PROPERTY SERVICES, IN  
Address: 125 N MARKET SUITE 1251  
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	1809	0	WITH 650 SX CMT
SURF	8.625	264		WITH 165 SX CMT <i>146.58</i>

Well Type: SWD UIC Docket No: D22331.0 Date/Time to Plug: 02/14/2008 8:15 AM  
Plug Co. License No.: 32970 Plug Co. Name: H-D OILFIELD SERVICE, INC.  
Proposal Rcvd. from: LEON KUHN Company: PETROLEUM PROPERTY SERVICE Phone: (785) 483-1559

Proposed Plugging Method: PUMP 300# HULLS & CMT TO FILL. PRESSURED TEST 8 5/8" x 4 1/2" ANNULUS.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 02/14/2008 9:00 AM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMP 300# HULLS & 140 SX CMT. PRESSURED TO 350#. HELD AT 350#. TIED ONTO BACKSIDE & PUMPED 1/4 BBL. PRESSURED TO 500# & HELD.

Perfs:

Top	Bot	Thru	Comments
1588	1600		
1524	1534		
1508	1514		


**INVOICED**  
DATE 2-29-08  
INV. NO. 2008061305

RECEIVED  
KANSAS CORPORATION COMMISSION  
FEB 27 2008  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: CSG

District: 01

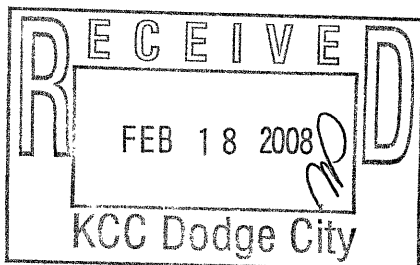

Signed

*Michael Maier*  
(TECHNICIAN)