

R


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Butler County, Sec. 21 Twp. 27 Rge. 3 (E) (W)

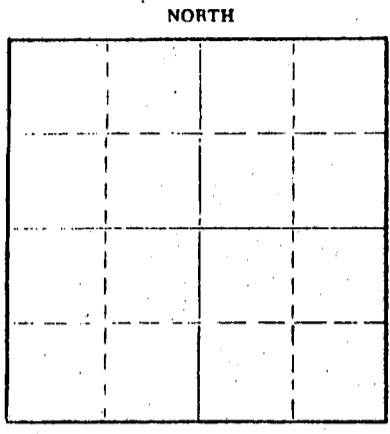

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines \_\_\_\_\_  
Lease Owner Shawver Armour, Inc.  
Lease Name Skaer Well No. 1  
Office Address 817 Central Building, Wichita, Ks.  
Character of Well (completed as Oil, Gas or Dry Hole) oil well  
Date well completed April 12 19 61  
Application for plugging filed Nov 18-65 19  
Application for plugging approved Nov 19-65 19  
Plugging commenced Dec 4-65 19  
Plugging completed Dec 4-65 19  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production Sept 7 19 65  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Paul Turpin  
Producing formation Kansas City Depth to top 2297 Bottom \_\_\_\_\_ Total Depth of Well 3042 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<del>XXXXXXXXXXXXXXXXXXXX</del> Kansas City	water	-0-	2297	5 1/2"	2297	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Set a plug at 2250' sand to 2240'  
Mixed and dumped 5 sacks cement  
Pulled 1481 ft of 5 1/2" casing  
Pumped a plug to 175' with 50 sacks cement (Let set for 16 hrs.)  
Added 2 sacks cement to top of surface pipe  
Welded plate on surface pipe  
(187' of 8 5/8" surface pipe - circulated)

RECEIVED  
STATE CORPORATION COMMISSION  
12/13/65  
DEC 13 1965

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Ralph Comstock  
Address Stafford, Kansas

STATE OF KANSAS COUNTY OF Sedgwick, ss.  
James M. Armour (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James M. Armour  
James M. Armour, President  
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of December, 19 65



December 10, 1967

Claire Jones  
Claire Jones  
Notary Public.

15-015-00535-00-00

DRILLER'S LOG

FARM NAME: Skaer # 1 LOCATION: Approx SE SE SW  
 Sec. 21-27S-3E  
 CONTRACTOR: Shawver Armour, Inc. Butler County, Kansas  
 OWNER: Shawver Armour, Inc. ELEVATION: 1294 K B  
 COMMENCED: April 6, 1961 COMPLETED: April 12, 1961  
 CASING RECORD: 187' 8 5/8" w/135 sacks cement & 4 sacks cc

=====

FORMATION:		TOPS:	
Shale & Lime	1450	Lansing	1908
Lime & Shale	1705	Kansas City	2297
Shale & Lime	1985	Base Kansas City	2490
Lime & Shale	2165	Mississippian	2757
Shale & Lime	2280	Kinderhook	2974
Lime & Shale	2320	Simpson	3036
Lime	2490		
Shale & Lime	2572		
Lime & Shale	2669		
Shale & Lime	2771		
Lime	2964		
Shale & Sand	3042		
ROTARY TOTAL DEPTH	3042		

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 NOV 19 1965  
 CONSERVATION DIVISION  
 TOPEKA, KANSAS

STATE OF KANSAS )  
 ) ss  
 SEDGWICK COUNTY )

I, James M. Armour, do hereby certify that the above log is a true and correct copy of the above captioned well as shown on the daily drilling reports.

SHAWVER ARMOUR, INC.

BY James M. Armour  
 James M. Armour

Subscribed and sworn to before me this 19th day of April, 1961

My commission expires Dec. 29th, 1963.

Marjorie Hall  
 Marjorie Hall, Notary Public

