


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

15-065-02420-06-00  
WELL PLUGGING RECORD

NORTH

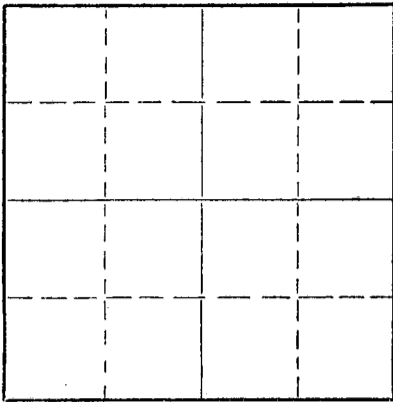

Locate well correctly on above  
Section Plat

Graham County, Sec. 27 Twp. 10 Rge. (X) 21 (W)  
Location as "NE/CNW&SW" or footage from lines SW/4 NENESW  
Lease Owner Phillips Petroleum Company  
Lease Name Kansas Well No. 1  
Office Address Box 779, Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed June 13, 19 52  
Application for plugging filed June 13, 19 52  
Application for plugging approved June 13, 19 52  
Plugging commenced June 13, 19 52  
Plugging completed June 13, 19 52  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes.

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty  
Producing formation Arbuckle Depth to top 3794 Bottom 3819 Total Depth of Well 3819 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Arbuckle</u>	<u>Dry</u>	<u>3794</u>	<u>3819</u>	<u>8-5/8"</u>	<u>245.23</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mudded hole 3819' to 240'. Set Howco plug at 240'. Dumped 20 sx. regular cement 240' to 200'. Mudded hole 200' to 40'. Set Howco plug at 40'. Dumped 1 sack Cotton Seed Hulls and 15 sx. cement in filling to base of cellar. Well plugged and abandoned 1:00 P.M. 6-13-52.

FORMATION RECORD ON THIS WELL WILL BE FORWARDED LATER


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Phillips Petroleum Company  
Address Oklahoma City, Oklahoma

STATE OF Kansas, COUNTY OF Barton, ss.  
A. T. Slagle (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) A. T. Slagle  
Box 779, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of June, 19 52  
November 18, 1953  
My commission expires

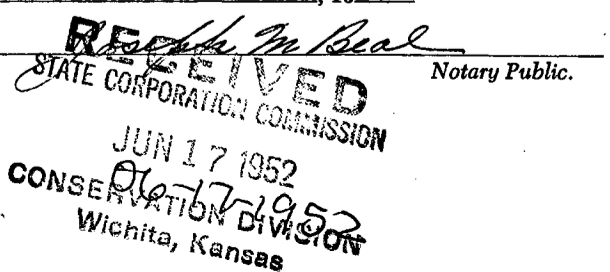

PLUGGING  
FILE SEC 27T 10 R 210  
BOOK PAGE 23 LINE 28

15-065-02420-00-06

Form No. 879

# Formation Record

Lease Kansas

Well No. 1

FROM	TO	Formation	REMARKS
0	167	Surface sand and clay.	
167	1487	Sand and shale.	
1487	2118	Red bed, pyrite and Anhydrite.	
2118	2312	Red bed, shale and lime streaks.	
2312	3172	Lime and shale.	
3172	3283	Shale and lime streaks.	
3283	3370	Cherty lime and shale streaks.	
3370	3445	Lime and shale.	
3445	3498	Lime.	
3498	3550	Hard lime.	
3550	3605	Lime.	
3605	3778	Lime and shale streaks.	
3778	3819	Lime.	

RECEIVED  
 STATE CORPORATION COMMISSION  
 JUN 25 1952  
 06-25-1952  
 CONSERVATION DIVISION  
 Wichita, Kansas

**PLUGGING**  
 FILE SEC 27 / OR 240  
 BOOK PAGE 23 / LINE 28