


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

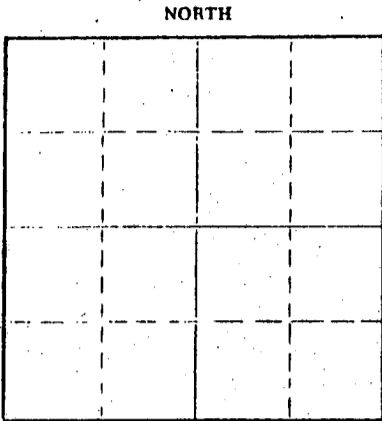

Locate well correctly on above
Section Plat

Butler County, Sec. 13, Twp. 27S Rge. 3 (E) (W)
Location as "NE/CNW&SW" or footage from lines S¹/₂ NE NE
Lease Owner Shawver Armour, Inc.
Lease Name Santa Fe Lake Well No. 2
Office Address 817 Central Building Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 8 1965
Application for plugging filed January 8 1965
Application for plugging approved January 8 1965
Plugging commenced January 8 1965
Plugging completed January 8 1965
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Paul Turpin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2987 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface	Water	-0-	220	8 5/8	220	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

#1 Plug Heavy mud to 200'
200' Howco Plug 1/4 sack hulls 20 sacks cement
#2 Plug Heavy mud to 35'
35' Howco Plug 1/4 sack hulls 8 sacks cement
Bridge rat @ 5' 2 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
1/18/65
JAN 18 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shawver Armour, Inc.
Address 817 Central Building Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK ss.
James M. Armour (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James M. Armour (James M. Armour)
817 Central Bldg. Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 15th day of January, 1965

Claire Jones
Claire Jones Notary Public.

My commission expires December 10, 1967



D R I L L E R ' S L O G

FARM NAME: Santa Fe Lake #2 LOCATION: S $\frac{1}{2}$ NE NE Sec. 13-27S-3E
 CONTRACTOR: SHAWVER ARMOUR, INC. Butler County, Kansas
 OWNER: SHAWVER ARMOUR, INC. ELEVATION: 1257 K. B.
 COMMENCED: January 2, 1965 COMPLETED: January 8, 1965
 CASING RECORD: 220' 8 5/8" w/256 sacks cement, 4 sacks cc.

FORMATION:

Soil 0-8
 Clay 15
 Sand 25
 Clay 45
 Shale 65
 Lime 95
 Shale 110
 Lime 140
 Shale 155
 Shell & Shale 175
 Lime 190
 Shale 200
 Shells & Shale 217
 Lime & Shale 240
 Shale & Lime 21433
 Kansas City 2214
 Lime 2408
 Lime & Shale 2730
 Lime 2914
 Kinderhook 2982
 Simpson 2987
 Rotary Total Depth 2987

TOPS:

Lansing 1815
 Kansas City 2143
 Base Kansas City 2387
 Mississippi Lime 2711
 Kinderhook 2913
 Simpson Sand 2982

RECEIVED
 STATE CORPORATION COMMISSION

JAN 18 1965

CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS }
 SEDGWICK COUNTY } ss

I, James M. Armour, do hereby certify that the above log is a true and correct copy of the above captioned well as shown on the daily drilling reports.

SHAWVER ARMOUR, INC.

BY James M. Armour
 James M. Armour

Subscribed and sworn to before me this 28th day of December 1964.

My commission expires Dec. 10th, 1967

Claire Jones
 Claire Jones Notary Public