

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Butler County, Sec. 13 Twp. 27 Rge. 3 (E) (W)

Location as "NE/CNW&SW&" or footage from lines C n² SE NW

Lease Owner Shawver Armour, Inc.

Lease Name Santa Fe Lake Well No. 1

Office Address 817 Central Bldg. Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed November 30 19 63

Application for plugging filed June 9 19 65

Application for plugging approved June 9 19 65


Plugging commenced June 9 19 65

Plugging completed June 9 19 65

Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production none 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

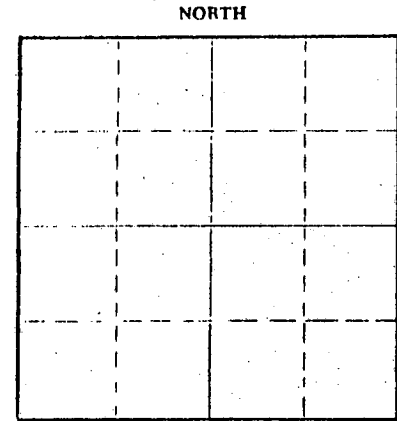

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Paul Turpin

Producing formation Simpson Depth to top 2952 Bottom 2967 Total Depth of Well 2967 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface	Water	-0-	170'	8 5/8	170'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole from 2967 to 2865 with sand. Mixed & dumped 5 sacks cement. Shot off pipe at 2425'. Pulled 2425' of 5 1/2" casing. Set a 15' Rock bridge at 215'. Filled hole from Bridge to surface with 3 cubic yards of redimix cement. 170' of 8 5/8" surface pipe - cemented.

RECEIVED
STATE CORPORATION COMMISSION
6/15/65
JUN 15 1965

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Ralph Comstock
Address Stafford, Kansas

STATE OF Kansas COUNTY OF Butler, ss.


Don Shawver, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Don Shawver (Don Shawver)
817 Central Bldg.
(Address)

SUBSCRIBED AND SWORN to before me this 14th day of June, 19 65

My commission expires December 10, 1967

Claire Jones
Claire Jones Notary Public.



15-015-19767-00-00 ^{SP}

DRILLER'S LOG

NAME: SANTA FE LAKE # 1 LOCATION: N/2 SE NW Sec 13-27S-3E
 Contractor: SHAWVER ARMOUR, INC. Butler County, Kansas
 OWNER: SHAWVER ARMOUR, INC. ELEVATION: 1281 KB
 COMMENCED: ~~November~~ 24, 1963 COMPLETED: November 30, 1963
 CASING RECORD: 170' 8 5/8" w/100 sacks cement & 2 sacks CC
 82 sacks common w/blend HA5
 2954' 5 1/2" w/30 sacks cement

FORMATION:

TOPS

Lime & Shale	585	Lansing	1828
Shale & Lime	1920	Kansas City	2167
Shale & Sand Streaks	2195	Base Kansas City	2398
Lime	2427	Mississippian	2692
Shale & Lime	2540	Kinderhook	2886
Lime & Shale	2645	Simpson	2952
Shale	2710		
Lime	2874		
Shale	2967		
Rotary Total Depth	2967		

RECEIVED
STATE CORPORATION COMMISSION

JUN 15 1965

STATE OF KANSAS }
SEDGWICK COUNTY } ss

CONSERVATION DIVISION
Wichita, Kansas

I, James M. Armour, do hereby certify that the above log is a true and correct copy of the above captioned well as shown on the daily drilling reports.

SHAWVER ARMOUR, INC.

BY James M. Armour
James M. Armour



Subscribed and sworn to before me this 5th day of December, 1963.

Marjorie Hall
Marjorie Hall, Notary Public