

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-22701-00-00
Spot: NENENW Sec/Twnshp/Rge: 27-24S-14W
4950 feet from S Section Line, 2970 feet from E Section Line
Lease Name: SPARKS Well #: 1
County: STAFFORD Total Vertical Depth: 4255 feet

Operator License No.: 8061
Op Name: OIL PRODUCERS INC. OF KANSAS
Address: 1710 WATERFRONT PKWY
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4263	2020	WITH 200 SX CMT
SURF	8.625	357		WITH 225 SX CMT

138.29

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/24/2007 1:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND BACK TO 3740' & 4 SX CMT. PLUG AT 870' WITH 50 SX CMT. PLUG AT 390' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: LINDLEY REIMER
Date/Time Plugging Completed: 10/24/2007 2:05 PM

Witness Type: COMPLETE (100%)
KCC Agent: RICHARD LACEY

Actual Plugging Report:

SQUEEZED AT 2631-2940' WITH 100 SX CMT. SANDED TO 3730' & 4 SX CMT WITH DUMP BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 870' WITH 15 SX GEL - 50 SX CMT. 2ND PLUG AT 390' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4205	4208		
4027	4032		
3786	3790		
2908	2940		
2631	2681		

INVOICED


DATE 11-7-07
INV. NO. 2008060726

RECEIVED
KANSAS CORPORATION COMMISSION
NOV 01 2007
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY CEMENTING.

Plugged through: CSG

District: 01

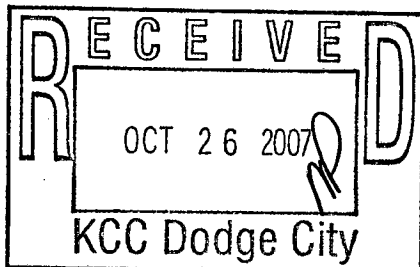

Signed

Richard W. Lacey

(TECHNICIAN)

[Handwritten signature]