

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-24317-00-00
Spot: NENENE Sec/Twnshp/Rge: 28-16S-24W
100 feet from N Section Line, 480 feet from E Section Line
Lease Name: ANDERSON TILLITSON Well #: 1
County: NESS Total Vertical Depth: 4505 feet

Operator License No.: 30742
Op Name: PALOMINO PETROLEUM, INC.
Address: 4924 SE 84TH ST
NEWTON, KS 67114

| String | Size | Depth (ft) | Pulled (ft) | Comments |
|--------|-------|------------|-------------|------------------------|
| PC | | 1862 | | WITH 165 SX TO SURFACE |
| PROD | 5.5 | 4491 | 0 | WITH 160 SX CMT |
| SURF | 8.625 | 264 | | WITH 185 SX CMT |

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/16/2007 1:20 PM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC. 146.41
Proposal Rcvd. from: PATRICK GERSTNER Company: SWIFT SERVICES, INC. Phone: (785) 798-2300

Proposed Plugging Method: PUMP 35 SX CMT & 150# HULLS, THEN GEL SPACER. CIRCULATE CMT TO SURFACE. USE 50 SX CMT FOR BACKSIDE.

Plugging Proposal Received By: MICHAEL MAIER Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 10/16/2007 5:30 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMPED DOWN 5 1/2" CASING WITH 35 SX CMT WITH 150# HULLS MIXED IN, 19 SX GEL, 175 SX CMT. MAXIMUM PRESSURE 1000#. SHUT IN PRESSURE 800#. PUMPED DOWN 8 5/8" X 5 1/2" ANNULUS WITH 30 SX CMT. PRESSURED TO 400# & HELD.

Perfs:

| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 4491 | 4527 | OH | |


RECEIVED
KANSAS CORPORATION COMMISSION
NOV 05 2007
CONSERVATION DIVISION
WICHITA, KS

INVOICED
DATE 11-9-07
INV. NO. 2008060745

Remarks: USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

Plugged through: CSG

District: 01

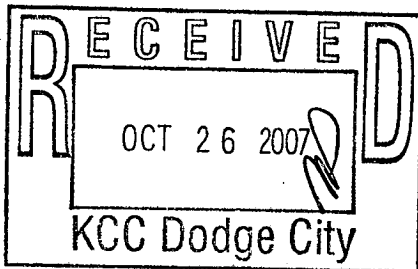

Signed

Michael Maier
(TECHNICIAN)

PKT