

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-00036-00-00
Spot: NWNWSE Sec/Twnshp/Rge: 15-27S-15W
2310 feet from S Section Line, 2310 feet from E Section Line
Lease Name: THOMPSON Well #: 1
County: PRATT Total Vertical Depth: 4820 feet

Operator License No.: 31925
Op Name: QUALITY WELL SERVICE, INC.
Address: 190 US HWY 56
ELLINWOOD, KS 67526

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4612	2200	
SURF	8.625	318		

156.65

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 03/06/2008 8:45 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: PUMP 200# HULLS & 25 SX CMT. PLUG AT 1000' WITH 15 SX GEL & 50 SX CMT. PLUG AT 340' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 03/06/2008 10:45 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

PUMPED DOWN 5 1/2" CASING WITH 150# HULLS & 25 SX CMT. TAGGED TOP OF CMT AT 4020'. SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 1000' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 340' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4509	4514		

INVOICED

DATE 4-10-08
INV. NO. 2008061517


RECEIVED
KANSAS CORPORATION COMMISSION
MAR 27 2008

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY OILWELL CEMENTING.

CONSERVATION DIVISION
WICHITA, KS

Plugged through: CSG

District: 01

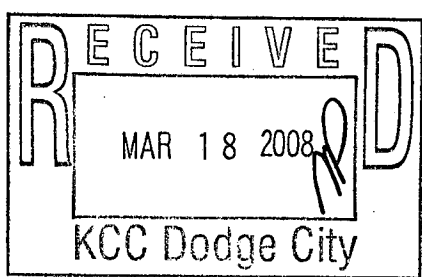

Signed Stephen J. Pfeifer
(TECHNICIAN)

Form CP-28
[Handwritten initials]