

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-23256-00-00

Spot: SWSE

Sec/Twnshp/Rge: 2-32S-14W

828 feet from S Section Line,

1838 feet from E Section Line

Lease Name: LAKE

Well #: 1

County: BARBER

Total Vertical Depth: 3863 feet

Operator License No.: 5046

Op Name: RAYMOND OIL COMPANY, INC.

Address: PO BOX 48788

WICHITA, KS 67202

String Size Depth (ft) Pulled (ft) Comments

SURF 8.625 292

125.55

Well Type: LH

UIC Docket No:

Date/Time to Plug: 03/11/2008 3:30 PM

Plug Co. License No.: 5929

Plug Co. Name: DUKE DRILLING CO., INC.

Proposal Rcvd. from: SONNY MARTIN

Company: DUKE DRILLING CO., INC.

Phone: (316) 267-1331

Proposed Plugging Method: 1ST PLUG AT 690' WITH 150 SX CMT. 2ND PLUG AT 330' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. 4TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE

Plugging Proposal Received By: ERIC MACLAREN

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 03/12/2008 1:00 AM

KCC Agent: STEVE PFEIFER

Actual Plugging Report:

Perfs:

LOST CIRCULATION DECIDED TO PLUG. 1ST PLUG AT 690' WITH 50 SX CMT. LET CMT SET. RAN WIRE LINE. TAG CMT AT 730'. RUN BACK TO 690' & SPOT ANOTHER 50 SX CMT. LET CMT SET. TAG CMT @ 730'. NO FILL. SPOT 50 SX CMT AT 690'. LET CMT SET. TAG CMT. TOP OF CMT @ 530'. 2ND PLUG AT 330' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. 4TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

INVOICED

DATE 4-10-08
INV. NO. 2008061518

RECEIVED
KANSAS CORPORATION COMMISSION


MAR 27 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 3% CC & COMMON CMT WITH 3% CC BY ALLIED.

Plugged through: DP

District: 01

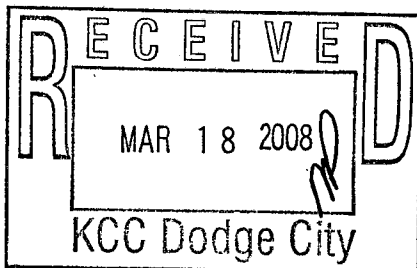

Signed

Stephen J Pfeifer
(TECHNICIAN)

Form CP-2/3