

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-101-22081-00-00  
Spot: NENWNE Sec/Twnshp/Rge: 27-20S-30W  
150 feet from N Section Line, 1680 feet from E Section Line  
Lease Name: STEVENSON-YORK Well #: 1  
County: LANE Total Vertical Depth: 4740 feet

Operator License No.: 4767  
Op Name: RITCHIE EXPLORATION, INC.  
Address: 8100 E 22ND ST N # 700 BOX 783188  
WICHITA, KS 67278

String Size Depth (ft) Pulled (ft) Comments  
SURF 8.625 217 WITH 170 SX CMT

154.05

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/19/2008 7:00 AM  
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.  
Proposal Rcvd. from: GREG UNRUH Company: MURFIN DRILLING CO., INC. Phone: (316) 267-3241

Proposed Plugging Method: 1ST PLUG AT 2170' WITH 50 SX CMT. 2ND PLUG AT 1380' WITH 80 SX CMT. 3RD PLUG AT 680' WITH 50 SX CMT. 4TH PLUG AT 250' WITH 50-SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY Witness Type: NONE  
Date/Time Plugging Completed: 03/19/2008 9:00 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

1ST PLUG AT 2170' WITH 50 SX CMT. 2ND PLUG AT 1380' WITH 80 SX CMT. 3RD PLUG AT 680' WITH 50 SX CMT. 4TH PLUG AT 250' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:


INVOICED  
DATE 4-10-08  
INV. NO. 2008061519

RECEIVED  
KANSAS CORPORATION COMMISSION  
APR 03 2008  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

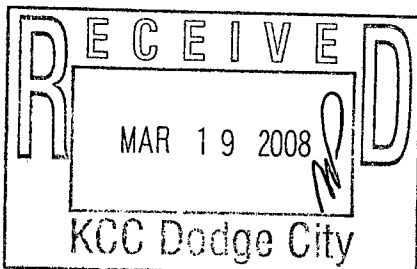

Signed

Richard W. Lacey

(TECHNICIAN)

Form 67-213

PKT