

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-129-10290-00-01
Spot: SWSWNE Sec/Twnshp/Rge: 5-33S-43W
3126 feet from S Section Line, 2422 feet from E Section Line
Lease Name: LIGHT B Well #: 1
County: MORTON Total Vertical Depth: 3350 feet

Operator License No.: 5447
Op Name: OXY USA INC.
Address: 5 E GREENWAY PLZ PO BOX 27570
HOUSTON, TX 77227

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	3348	675	WITH 450 SX CMT
SURF	8.625	600		WITH 300 SX CMT

\$ 108.88

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 03/13/2008 9:00 AM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGIN Phone: (580) 854-6515

Proposed Plugging Method: PUMP 500# HULLS & 25 SX CMT. PLUG AT 1400' WITH 25 SX CMT. PLUG AT 600' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 03/14/2008 2:00 PM KCC Agent: JACK MACLASKEY

Actual Plugging Report:

1ST PLUG PUMP 500# HULLS & 25 SX CMT. 2ND PLUG PUMP 25 SX CMT AT 1400'. NEVER HELD. FL @ 2400'. TOC @ 2731'. PUMPED 25 SX CMT AT 2731'. 3/14/08: TOC @ 2186'. PLUG AT 1400' WITH 25 SX CMT. PLUG AT 630' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3098	3108		
3068	3082		
3058	3066		
3024	3028		
3010	3018		
2978	2986		
2960	2964		
2898	2904		
2857	2862		
2847	2852		
2825	2830		
2812	2816		
2714	2729		

INVOICED
DATE 4-3-08
INV. NO. 2008061473

RECEIVED
KANSAS CORPORATION COMMISSION


Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: CSG

MAR 24 2008

CONSERVATION DIVISION
WICHITA, KS

District: 01

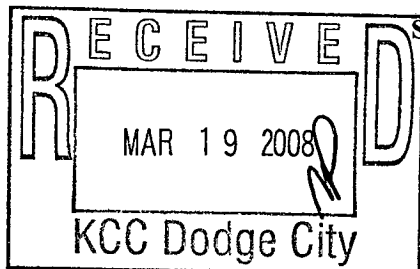

Signed

Jack L MacLachlan
(TECHNICIAN)

Form CP-2/3

PKT