

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-165-21569-00-00
Spot: SESWSE Sec/Twnshp/Rge: 32-16S-19W
382 feet from S Section Line, 1882 feet from E Section Line
Lease Name: LITTLER Well #: 4
County: RUSH Total Vertical Depth: 3817 feet

Operator License No.: 32500
Op Name: T & P OIL & GAS, L.L.C.
Address: 7801 METCALF
OVERLAND PARK, KS 66204

String	Size	Depth (ft)	Pulled (ft)	Comments
PC		1310		WITH 250 SX CMT
PROD	4.5	3804	0	WITH 150 SX CMT
SURF	8.625	371		WITH 250 SX CMT

\$ 124.05

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 03/14/2008 11:00 AM
Plug Co. License No.: 32810 Plug Co. Name: PROFESSIONAL PULLING SERVICES LLC
Proposal Rcvd. from: IRVIN HASELHORST, JR. Company: T & P OIL & GAS Phone: (785) 623-1154

Proposed Plugging Method: RUN TBG TO 3800' & SPOT 300# HULLS & 30 SX CMT. PULL TBG TO 1310' & CIRCULATE TO SURFACE. PRESSURE TEST 8 5/8" X 4 1/2" ANNULUS.

Plugging Proposal Received By: RICHARD LACEY Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 03/14/2008 1:30 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:

1ST PLUG RAN 2 3/8" TBG TO 3768' & PUMPED 15 SX GEL, 30 SX CMT & 200# HULLS. ESTABLISHED CIRCULATION. 2ND PLUG PULL TBG TO 1310' & CIRCULATE CMT TO SURFACE WITH 90 SX CMT. 3RD PLUG PUMP 10 SX CMT DOWN 8 5/8" X 4 1/2" ANNULUS. TESTED TO 400#.

Perfs:

Top	Bot	Thru	Comments
3804	3817	OH	

INVOICED
DATE 4-3-08
INV. NO. 2008061480

RECEIVED
KANSAS CORPORATION COMMISSION

Remarks: USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

Plugged through: TBG

MAR 24 2008


CONSERVATION DIVISION
WICHITA, KS

District: 01

Signed

Steve Durrant

(TECHNICIAN)

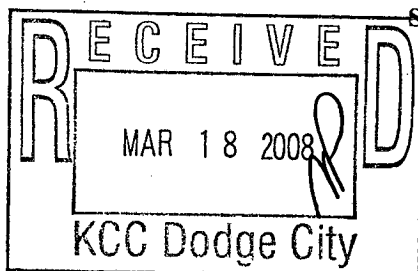

PKF