


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

**WELL PLUGGING RECORD**

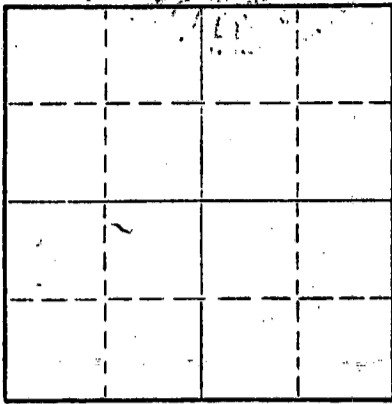

Locate well correctly on above Section Plat

Books \_\_\_\_\_ County, Sec. 32 Twp. 10 Rgs. 16 (E) (W) x  
Location as "NE/CNW/SE" or footage from lines NW NW SE  
Lease Owner Zenith Drilling Corporation, Inc.  
Lease Name ~~XXXXXXXXXXXX~~ Wetherill Well No. #1  
Office Address 300 W. Douglas, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 10  
Application for plugging filed 11-21-68 10  
Application for plugging approved \_\_\_\_\_ 10  
Plugging commenced 12-14-68 10  
Plugging completed 12-17-68 10  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 10  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? \_\_\_\_\_

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3660' Feet  
Show depth and thickness of all water, oil and gas formations.

**OIL, GAS OR WATER RECORDS**

**CASING RECORD**

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3615'	2855.99'
				8 5/8"	157'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Made bottom hole plug back with sand to 3300'. Mixed and ran 5 sacks cement thru dump bailer.  
Squeezed hole with 5 sacks hulls followed with 25 sacks gel. Released plug and displaced with 150 sacks pozmix cement with 6% gel.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 19 1968  
CONSERVATION DIVISION  
Wichita, Kansas

12-19-1968


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364, Great Bend, Kansas

STATE OF Kansas COUNTY OF Benton, ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
Box 364, Great Bend, Kansas  
(Address)

Subscribed and sworn to before me this 18 day of December, 1968

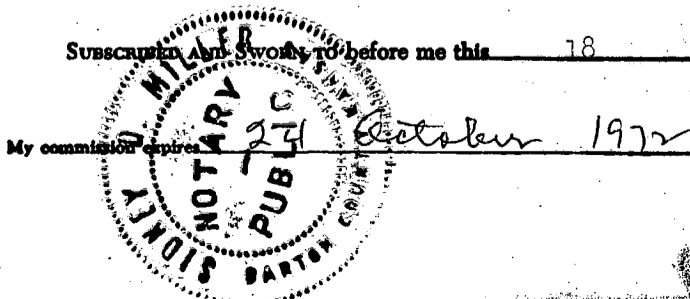

Sidney D. Miller  
Notary Public.