

15-183-20136-00-00

WELL PLUGGING RECORD

STATE OF KANSAS STATE CORPORATION COMMISSION

Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 800 Bitting Building Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Rooks County. Sec 2 Twp. 10 Rge. 16 (E) (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. SE SW NE

Lease Owner. B & R Drilling, Inc.

Lease Name. Pfortmiller Well No. #1

Office Address. P.O. Box 487, Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed. 9/30/48 19.

Application for plugging filed. 12/6/48 (Verbally) 19.

Application for plugging approved. 12/6/48 19.


Plugging commenced. 12/4/48 19.

Plugging completed. 12/15/48 19.

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production. 19.

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

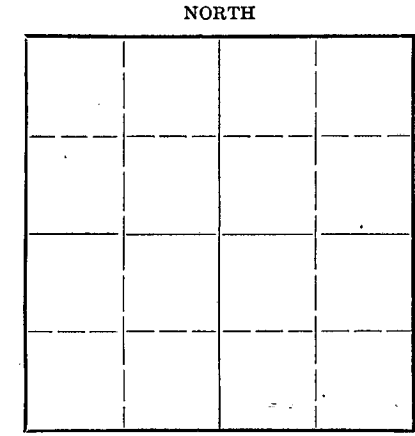

Name of Conservation Agent who supervised plugging of this well. M. A. Rives

Producing formation. Depth to top. Bottom. Total Depth of Well. 3835' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with columns: Formation, Content, From, To, Size, Put In, Pulled Out. Contains data for 8 5/8" @ 78' and 5 1/2" @ 3383'.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Total Depth 3835' - 5 1/2" OD Casing Set @ 3383' - Plug Set @ 3066' - Top of perforations @ 2910' - Plugged back from 3066' to 2905' with crushed rock - Dumped 5 sacks cement @ 2905' - Mud to 150' - Dumped 15 sacks cement on 10' rock bridge @ 150' - 10 sacks cement on top.

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to B & R Drilling, Inc. P.O. Box 487 Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss. C. L. Roberts (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Handwritten Signature]

(Address) 48



SUBSCRIBED AND SWORN to before me this 30 day of December 19 48

My commission expires 6/17/50

[Handwritten Signature: Clara L. Roberts] Notary Public.

22-237 7-47-10M

PLUGGING FILE SEC 2 T 10 R 16 W BOOK PAGE 71 LINE 40

12/31/48

STAT.

B & R Drilling, Inc.
Pfortmiller #1

Sec. 2 Twp. 10 Rge. 16
County: Rooks, Kansas

Total Depth: 3502'
Comm: 9/18/48
Comp: 9/30/48

Top Lansing K.C.-3135
" Cong. -3451
" Arbuckle -3487

Casing	Cement
8 5/8 Set @ 78'	50 sx - Circulated
5 1/2 Set @ 3383	100 sx

Formation:	Depth:
Surface clay	15
Post rock	60
Shale & Shells	510
Sand & Shale	650
Shale & Shells, Sand	805
Shale & Shells	1150
Anhydrite	1179
Shale	1595
Shale & Lime	1780
Gray sandy lime	1805
Lime & Shale	2130
Lime	2320
Lime & Shale	2894
Lime & Shale	3057
Lime	3379
Shale	3439
Lime & Shale	3502

STATE OF KANSAS)
) SS
RUSSELL COUNTY)

I hereby certify that the above information is true and correct to the best of my knowledge.

Mary Lou Kibler

Subscribed and sworn to before me this 9th day of October, 1948.

Clara L. Sumner
Notary Public

My Comm. Expires 6/17/50

PLUGGING
FILE SEC 2T 10 R 16 12
ROOK PAGE 71 LINE 40