


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

NORTH

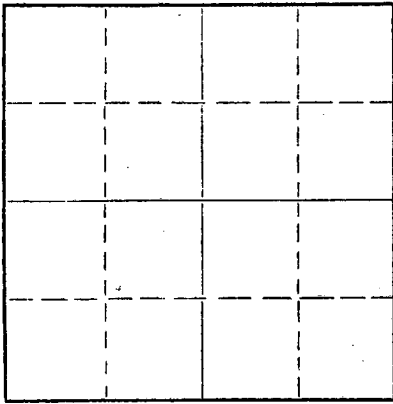

Locate well correctly on above
Section Plat

Rooks County, Sec. 2 Twp. 10 Rge. 16 (E) W (W)
Location as "NE/CNW%SW%" or footage from lines C S/2 SW NW
Lease Owner West Supply Company
Lease Name Kruse Well No. 1
Office Address Chase, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 7-29-61 _____ 19____
Plugging completed 8-1-61 _____ 19____
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3310 Feet
3315 KCC ZAD
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	225'	None
				5-1/2"	3310'	770'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked casing to 3090', set plug @ 3090' and dumped sand to 3080'. Dumped 4 sacks of cement @ 3080'. Pulled 10 jts. of 5 1/2" casing, pumped 5 sacks of jell & 20 sacks of mud and 20 sacks of cement to 420'. Pulled 5 1/2" casing to 170' and pumped 20 sacks of cement. Pulled balance of 5 1/2" casing, checked fluid to 20' and ran 20 7 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
8/8/61
AUG 8 1961

PLUGGING COMPLETE.

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling Company
Address Chase, Kansas

STATE OF Kansas, COUNTY OF Rice, ss.
Noel J. Knight (employee of owner) or ~~(owner of well)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of August, 1961

My commission expires May 20, 1964

Melton J. Volin
Notary Public.




15-163-2245-00-00
WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas
03545

Company- BROADVIEW OIL CO.
Farm- Kruse No. 1

SEC. 2 T. 10 R. 16W
C S $\frac{1}{2}$ SW NW

Total Depth. 3315'
Comm. 11-1-52 Comp. 11-14-52
Shot or Treated.
Contractor.
Issued. 2-16-57

County Neosho
KANSAS



CASING:
8" 70'
5" 3265'

Elevation. 1948
Production. 20 BO & NW

Figures indicate Bottom of Formations.

NO LOG AVAILABLE.

TOPS: Scout
Anhydrite 1110
Topeka 2818
Heebner 3049
Toronto 3072
Lansing 3093